




**CROWN**  
**PROFILES**




## FLAT BAR

| SECTION NO | THICKNESS | WEIGHT RANGE/12FT |
|------------|-----------|-------------------|
| 4021       | 25X3      | 0.800/1.00        |
| 4019-2     | 25x5      | 1.200             |
| 4012-1     | 25x6      | 1.400             |
| 4010-1     | 30X3      | 0.900             |
| 4011-2     | 30X6      | 1.900             |
| 4011-1     | 30X8      | 2.300             |
| 4011       | 30X10     | 3.0/3.2           |
| 4010       | 35X3      | 1.1/1.3           |
| 4010-2     | 40X4      | 1.600             |
| 4015       | 40X6      | 2.4/2.6           |
| 4020       | 40X7      | 2.800             |
| 4012       | 40X10     | 4.0/4.2           |
| 4019-1     | 50X5      | 2.240             |
| 4013       | 50X10     | 5.0/5.2           |
| 4013-1     | 50X12     | 6.320             |
| 4014       | 60X10     | 6.0/6.2           |
| 4016-1     | 88X5      | 6.590             |
| 4017       | 88X6      | 5.0/5.2           |
| 4016       | 85X8      | 6.6/6.8           |
| 4019-3     | 100X5     | 4.80              |
| 4018       | 100X10    | 10.0/10.2         |

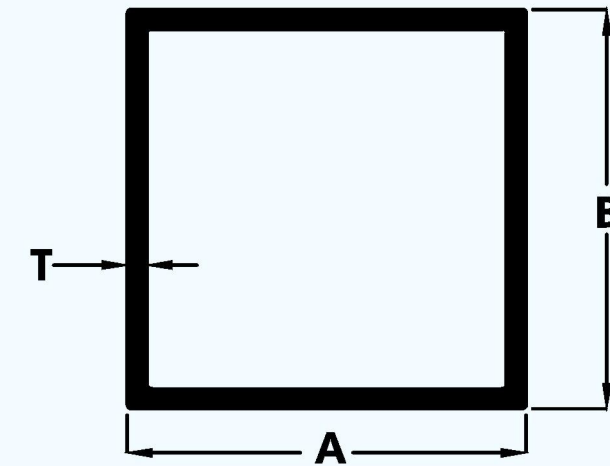


| SECTION NO | A     | B     | T   | WEIGHT\12FT |
|------------|-------|-------|-----|-------------|
| 1121       | 31.00 | 31.00 | 1.2 | 1.400/1.600 |
| 1120       | 63.00 | 63.00 | 1.1 | 2.600/2.800 |
| 5001       | 38.00 | 38.00 | 1.2 | 1.700/1.900 |

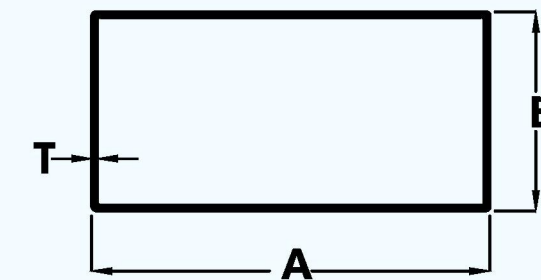

| SECTION NO | A   | B  | T    | WEIGHT\12FT |
|------------|-----|----|------|-------------|
| 1128       | 33  | 20 | 0.90 | 0.800/1.000 |
| 1124       | 38  | 25 | 0.90 | 1.000/1.200 |
| 1124/1     | 38  | 25 | 2.00 | 2.300/2.600 |
| 1124/2     | 38  | 25 | 0.80 | 0.800/1.000 |
| 1129       | 50  | 20 | 0.80 | 1.100/1.300 |
| 1123       | 50  | 25 | 2.00 | 2.700/2.900 |
| 1123/1     | 50  | 25 | 0.95 | 1.200/1.400 |
| 1122/1     | 60  | 34 | 0.80 | 1.400/1.600 |
| 1122/2     | 63  | 38 | 0.75 | 1.400/1.600 |
| 1127       | 63  | 25 | 0.85 | 1.300/1.500 |
| 1122       | 63  | 38 | 1.50 | 3.000/3.200 |
| 1125       | 100 | 25 | 1.20 | 2.700/2.900 |
| 1126       | 125 | 25 | 1.15 | 3.400/3.600 |




EQUAL ANGLE




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1354       | 25.00 | 25.00 | 1.50 | 0.900/1.100 |
| 1355       | 38.00 | 38.00 | 2.00 | 2.200/2.400 |
| 1353       | 19.00 | 19.00 | 1.50 | 0.700/0.900 |
| 1352-1     | 38.00 | 38.00 | 3.00 | 1.500/1.700 |


ROUND PIPE

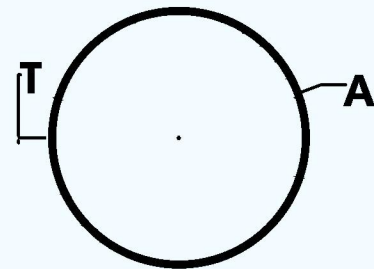

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1230       | 30.00 | 28.60 | 0.70 | 0.600/0.800 |
| R67        | 38.00 | 36.86 | 0.76 | 0.900/1.000 |

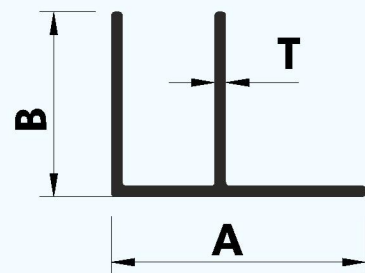


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| R63        | 22.00 | 16.00 | 1.00 | 0.500/0.600 |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| R61        | 25.00 | 25.00 | 1.00 | 0.500/0.600 |
| R62        | 19.00 | 19.00 | 1.00 | 0.400/0.500 |




| SECTION NO | A     | B     | T | WEIGHT\12FT |
|------------|-------|-------|---|-------------|
| JD 01      | 16.00 | 13.20 |   | 1.800/2.000 |



| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| R 64       | 12.00 | 12.00 | 1.00 | 0.250/0.350 |
| R 63       | 9.00  | 9.00  | 1.00 | 0.250/0.350 |
| R 65       | 14.80 | 9.00  | 1.00 | 0.350/0.450 |

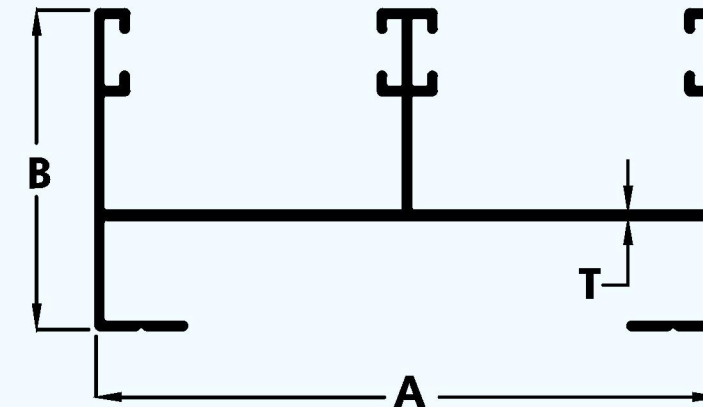


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1204-5     | 61.50 | 31.50 | 0.75 | 1.1/1.3     |
| 1204/3     | 61.50 | 31.50 | 0.85 | 1.5/1.7     |
| 1204/4     | 61.50 | 31.50 | 0.90 | 1.6/1.8     |
| 1204-1     | 61.50 | 31.50 | 1.00 | 2.1/2.3     |
| 1204-2     | 61.50 | 31.50 | 1.20 | 2.4/2.6     |
| 1204       | 61.50 | 31.50 | 1.50 | 2.8/3.0     |
| 1" 1001    | 75.00 | 25.40 | 1.10 | 1.8/2.0     |

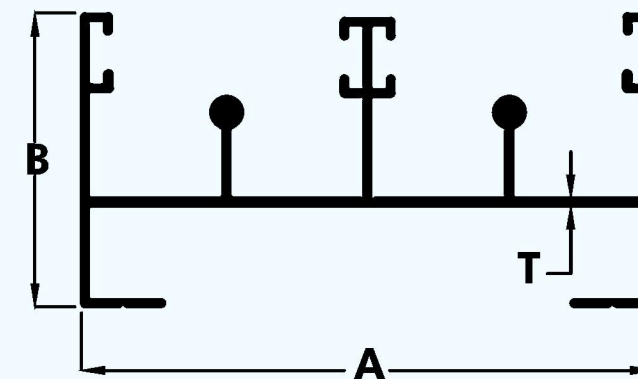


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1205-2     | 61.50 | 31.50 | 1.00 | 2.2/2.4     |
| 1205-1     | 61.50 | 31.50 | 1.20 | 2.8/3.0     |
| 1205       | 61.50 | 31.50 | 1.50 | 3.2/3.4     |
| 1205/3     | 61.50 | 31.50 | 1.00 | 1.8/2.0     |
| 1205/4     | 61.50 | 31.50 | 0.85 | 1.7/1.8     |
| 1205/5     | 61.50 | 31.50 | 0.85 | 1.5/1.7     |
| 1" 1002    | 75.00 | 25.40 | 1.10 | 2.2/2.4     |

## THREE TRACK TOP

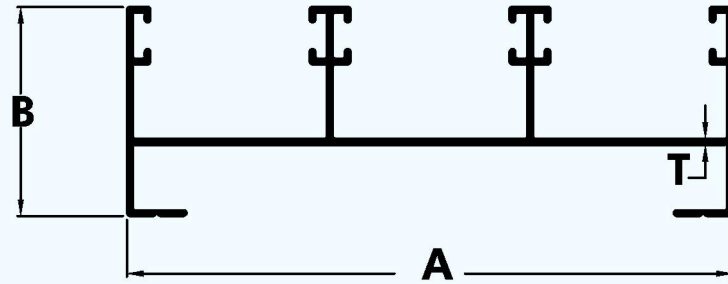


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 1206-5     | 92.00  | 31.75 | 0.75 | 1.400/1.600 |
| 1206       | 92.00  | 31.75 | 0.85 | 1.900/2.100 |
| 1206-4     | 92.00  | 31.75 | 1.50 | 2.600/2.800 |
| 1206-2     | 92.00  | 31.75 | 1.20 | 3.200/3.000 |
| 1206-3     | 92.00  | 31.75 | 1.50 | 3.800/4.000 |
| 1274       | 122.40 | 31.75 | 1.20 | 3.800/4.000 |
| 1" 1003    | 116.00 | 25.40 | 1.10 | 2.500/2.700 |

## THREE TRACK BOTTOM

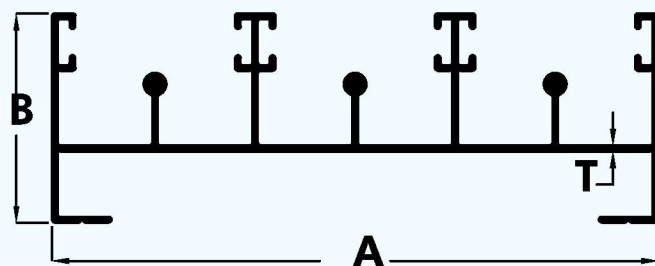


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 1207       | 92.00  | 31.75 | 0.95 | 2.500/2.700 |
| 1207-1     | 92.00  | 31.75 | 1.10 | 3.000/3.200 |
| 1207-2     | 92.00  | 31.75 | 1.20 | 3.600/3.800 |
| 1207-3     | 92.00  | 31.75 | 1.50 | 4.200/4.400 |
| 1275       | 122.40 | 31.75 | 1.15 | 4.000/4.200 |
| 1207/4     | 92.00  | 31.75 | 0.75 | 2.200/2.400 |
| 1" 1004    | 116.00 | 25.40 | 1.10 | 3.200/3.400 |

## HANDLE

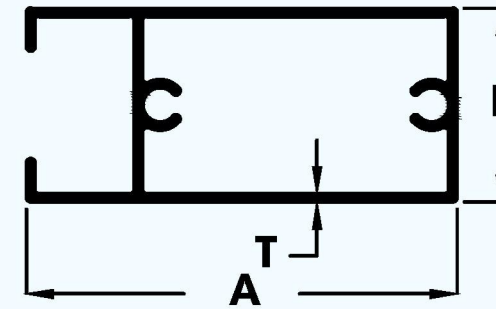


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1210-5     | 40.00 | 18.00 | 0.70 | 0.800/1.00  |
| 1210-4     | 40.00 | 18.00 | 0.80 | 1.100/1.300 |
| 1210       | 40.00 | 18.00 | 1.00 | 1.300/1.500 |
| 1210-3     | 40.00 | 18.00 | 1.00 | 1.400/1.600 |
| 1210-1     | 40.00 | 18.00 | 1.20 | 1.600/1.800 |
| 1210-2     | 40.00 | 18.00 | 1.50 | 2.000/2.200 |
| 1211-2     | 50.00 | 25.00 | 1.00 | 1.600/1.800 |
| 1211       | 50.00 | 25.00 | 1.20 | 2.100/2.300 |
| 1211-1     | 50.00 | 25.00 | 1.50 | 2.600/2.800 |
| 1211-3     | 50.00 | 25.00 | 1.00 | 1.400/1.600 |
| 1360       | 75.00 | 25.00 | 1.00 | 2.200/2.400 |
| 1211-4     | 50.00 | 25.00 | 0.80 | 1.200/1.400 |

## TOP BOTTOM

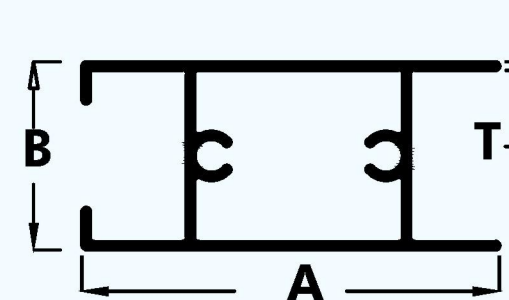


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1216-4     | 40.00 | 18.00 | 0.80 | 1.000/1.200 |
| 1216-3     | 40.00 | 18.00 | 0.95 | 1.300/1.500 |
| 1216       | 40.00 | 18.00 | 1.00 | 1.300/1.500 |
| 1216-1     | 40.00 | 18.00 | 1.30 | 1.600/1.800 |
| 1216-2     | 40.00 | 18.00 | 1.50 | 2.000/2.300 |
| 1216-3     | 52.00 | 18.00 | 1.10 | 1.300/1.400 |
| 1214       | 50.00 | 25.00 | 1.10 | 1.700/1.900 |

## INTERLOCK

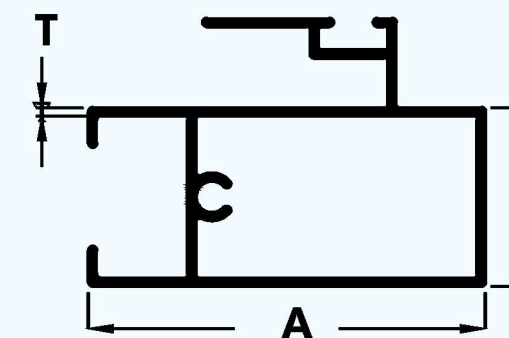


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1212-4     | 40.00 | 18.00 | 0.80 | 1.100/1.300 |
| 1212-1     | 40.00 | 18.00 | 0.95 | 1.400/1.600 |
| 1212-3     | 40.00 | 18.00 | 1.40 | 2.000/2.200 |
| 1212-2     | 40.00 | 18.00 | 1.50 | 2.200/2.400 |
| 1213       | 50.00 | 25.00 | 1.00 | 2.000/2.200 |
| 1268       | 60.00 | 18.00 | 1.00 | 1.900/2.200 |

**SINGLE PARTITION**

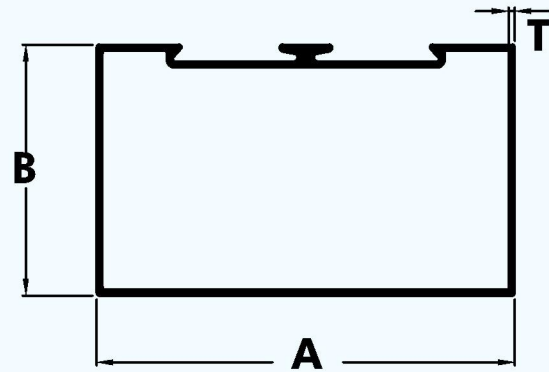

| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 1133-5     | 63.50  | 38.10 | 0.75 | 1.500/1.700 |
| 1133       | 63.50  | 38.10 | 0.75 | 1.600/1.800 |
| 1133-4     | 63.50  | 38.10 | 0.85 | 1.800/2.000 |
| 1133-1     | 63.50  | 38.10 | 1.50 | 3.200/3.300 |
| 1133-3     | 63.50  | 38.10 | 1.10 | 2.200/2.400 |
| 1133-2     | 63.50  | 38.10 | 1.60 | 3.200/3.500 |
| 1134       | 101.00 | 44.00 | 3.00 | 8.700/8.900 |
| 1134-1     | 101.00 | 44.00 | 1.00 | 3.300/3.500 |
| 1131       | 50.80  | 25.40 | 1.20 | 1.800/1.900 |

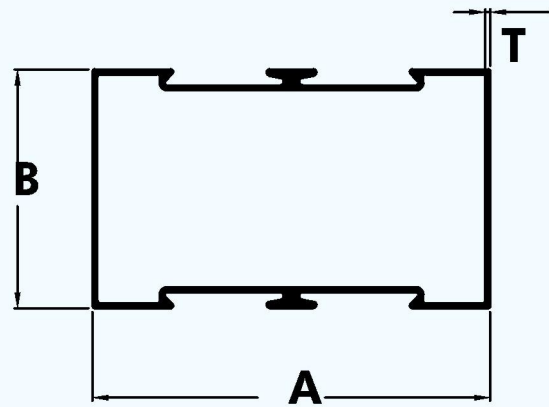

**DOUBLE PARTITION**


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 1132-1     | 63.50  | 38.10 | 0.80 | 1.900/2.100 |
| 1132-2     | 63.50  | 38.10 | 1.20 | 2.700/2.800 |
| 1132-3     | 63.50  | 38.10 | 1.50 | 3.200/3.300 |
| 1135       | 101.00 | 44.00 | 3.00 | 9.000/9.200 |
| 1135-1     | 101.00 | 44.00 | 1.00 | 3.600/3.700 |
| 1132-4     | 63.50  | 38.10 | 1.50 | 3.200/3.500 |

**GLAZING CLIP**


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1254       | 19.00 | 17.30 | 0.80 | 0.370/0.390 |
| 1254-1     | 19.00 | 17.30 | 0.70 | 2.500/3.00  |

**GLAZING PATTI**


| SECTION NO | A     | B    | T    | WEIGHT\12FT |
|------------|-------|------|------|-------------|
| 1112-1     | 44.45 | 3.10 | 0.56 | 0.550/0.650 |
|            |       |      |      |             |

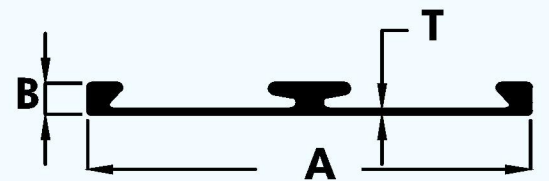


**L TUBE DOOR FRAME**

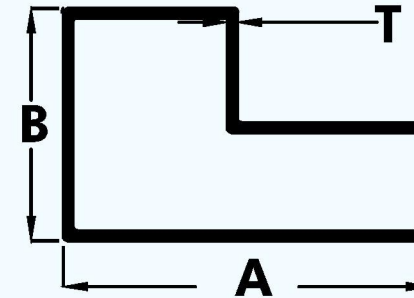

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1250-2     | 38.00 | 24.00 | 0.75 | 0.900/1.100 |
| 1250-1     | 38.00 | 24.00 | 1.00 | 1.000/1.200 |
| 1250       | 38.00 | 24.00 | 1.2  | 1.400/1.600 |

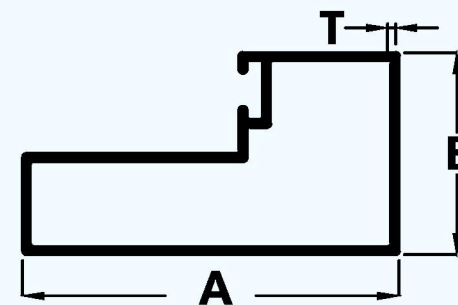


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1251-1     | 38.00 | 24.00 | 0.90 | 1.400/1.600 |
| 1251       | 45.00 | 24.00 | 1.20 | 1.700/1.900 |

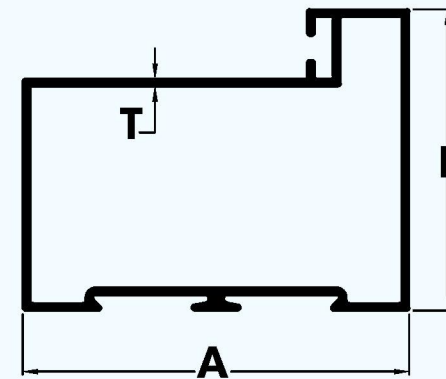

**LEG SINGLE PARTITION**

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1252-1     | 63.50 | 49.50 | 0.90 | 2.400/2.600 |
| 1252       | 63.50 | 49.50 | 1.50 | 3.900/4.200 |

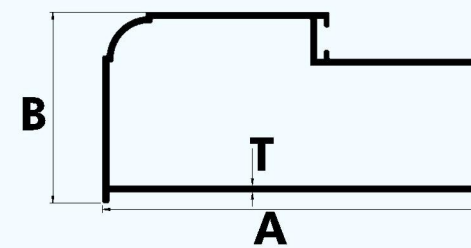

| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 1254       | 108.00 | 53.00 | 1.80 | 5.6/5.7     |
|            |        |       |      |             |



DOOR VERTICAL 45MM

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1243       | 47.62 | 44.45 | 1.10 | 2.300/2.500 |

DOOR TOP 45MM

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1241       | 47.62 | 44.45 | 1.10 | 2.2/2.4     |

DOOR MIDDLE DOUBLE 45MM

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1240       | 44.45 | 47.62 | 1.10 | 2.200/2.400 |

DOOR MIDDLE SINGLE

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1242       | 47.62 | 44.45 | 1.10 | 2.200/2.400 |

DOOR VERTICAL 85MM

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1270       | 85.00 | 44.45 | 1.30 | 3.500/3.800 |

DOOR TOP 85MM









| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1273       | 85.00 | 44.45 | 1.20 | 3.800/3.900 |

DOOR MIDDLE DOUBLE 85MM


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1271       | 85.00 | 44.45 | 1.15 | 3.800/3.900 |

DOOR BOTTOM

| SECTION NO     | A      | B     | T    | WEIGHT\12FT |
|----------------|--------|-------|------|-------------|
| 1260 small leg | 114.00 | 44.45 | 1.20 | 4.400/4.600 |
| 1261           | 114.00 | 44.45 | 1.20 | 4.400/4.600 |

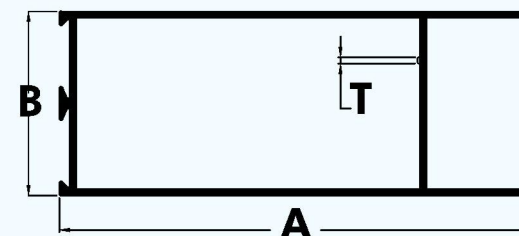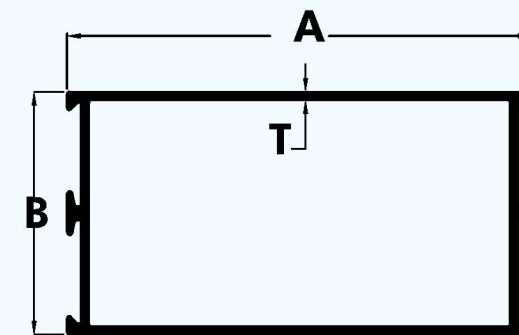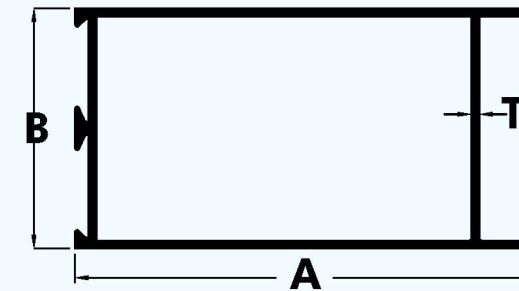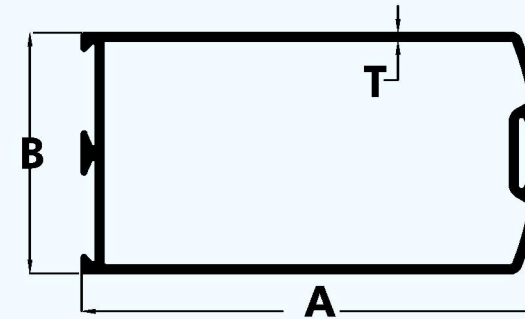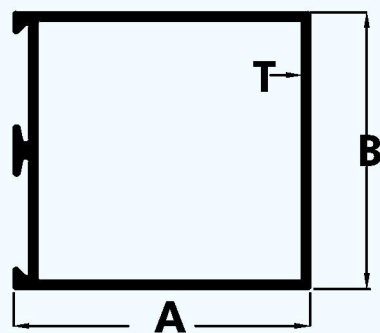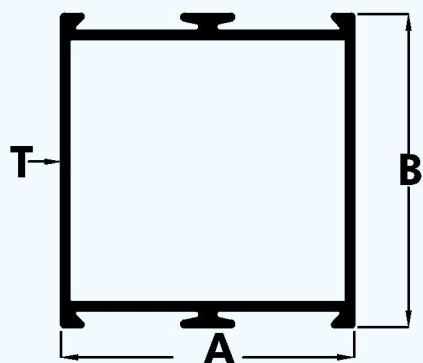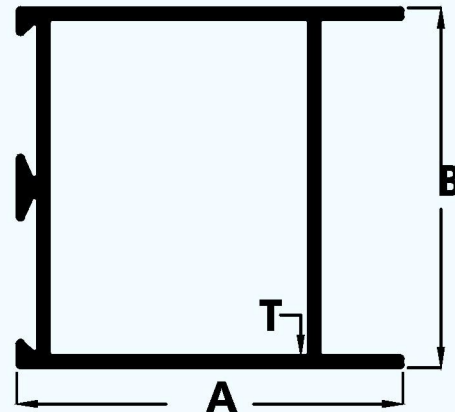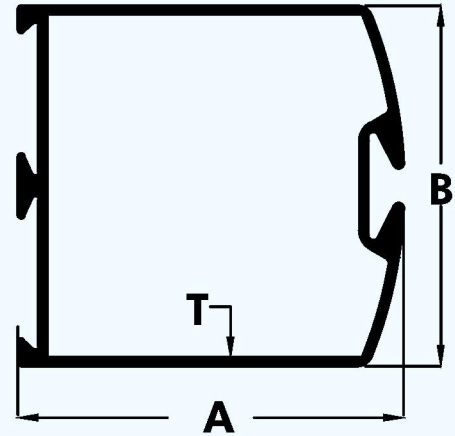


HANDLE 60X18MM

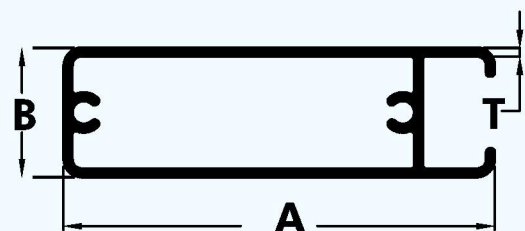

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1267-1     | 60.00 | 18.00 | 1.00 | 1.60/1.80   |
| 1267-2     | 60.00 | 18.00 | 1.25 | 2.30/2.50   |


INTERLOCK 60 X 108MM

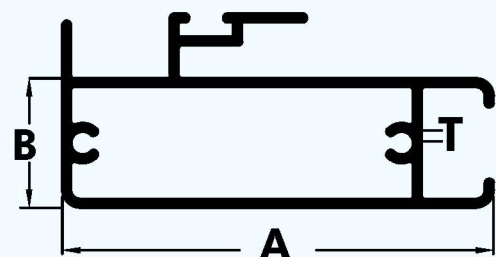


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1268-1     | 60.00 | 18.00 | 1.00 | 2.000/2.200 |
| 1268-2     | 60.00 | 18.00 | 0.90 | 1.900/2.000 |

BEARING BOTTOM 60 X18MM


SECTION NO - RAEC1269

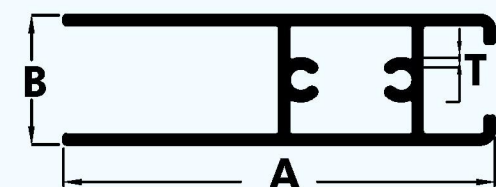

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1269-1     | 60.00 | 18.00 | 1.00 | 1.500/1.700 |
| 1269       | 60.00 | 18.00 | 1.25 | 2.400/2.600 |

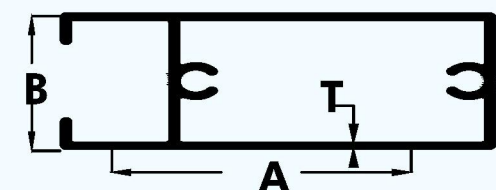


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1210-6     | 75.00 | 18.00 | 1.00 | 1.500/1.700 |
|            |       |       |      |             |

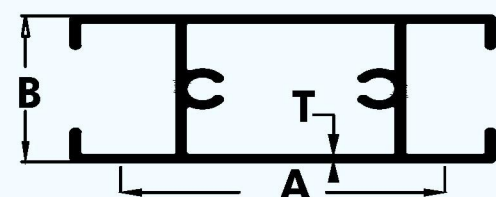


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1215-2     | 75.00 | 18.00 | 1.00 | 1.50/1.70   |
|            |       |       |      |             |

MOLDING HANDLE

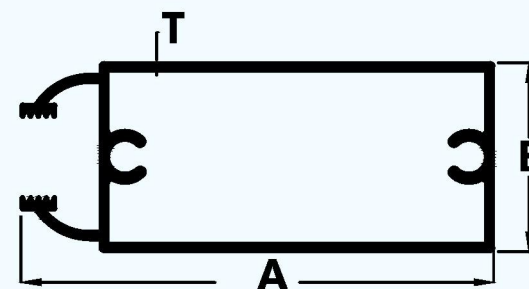


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1218       | 60.00 | 25.00 | 0.95 | 1.900/2.100 |

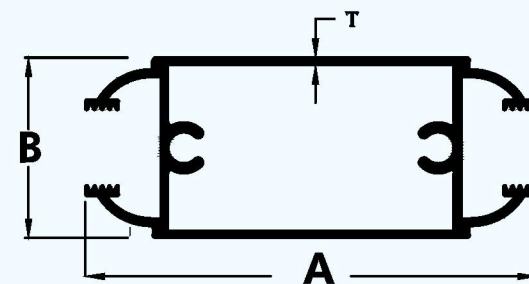


MOLDING MIDDLE

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1219       | 60.00 | 25.00 | 0.95 | 2.000/2.200 |

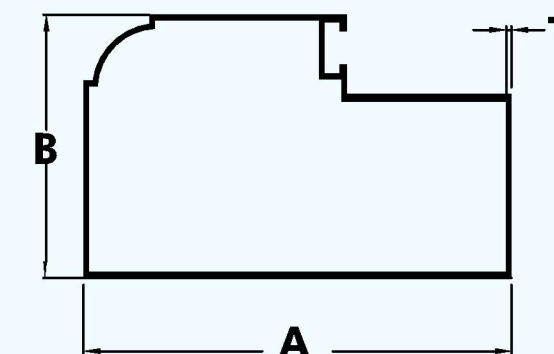

MOLDING L TUBE

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1253       | 65.00 | 40.00 | 1.10 | 2.100/2.300 |

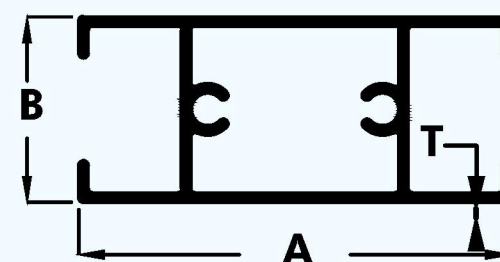


MIDDLE


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1215-1     | 40.00 | 18.00 | 0.80 | 1.000/1.200 |
| 1214-1     | 40.00 | 18.00 | 1.00 | 1.600/1.800 |
| 1361       | 75.00 | 25.00 | 0.90 | 2.300/2.500 |

SECTION NO - RAEC DH


THREE TRACK

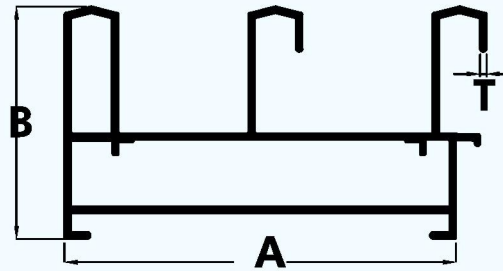


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 301        | 75.41 | 44.80 | 1.50 | 4.800/5.000 |
| 301-1      | 75.41 | 44.80 | 1.20 | 4.100/4.300 |
| 301-2      | 75.41 | 44.80 | 1.15 | 3.400/3.600 |

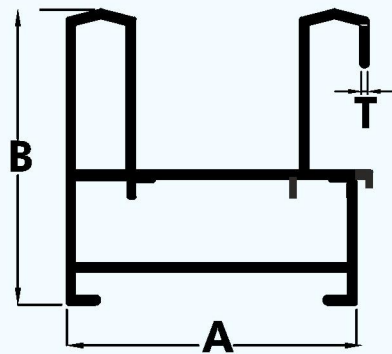


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 300        | 45.00 | 45.00 | 1.10 | 2.600/2.800 |
|            |       |       |      |             |

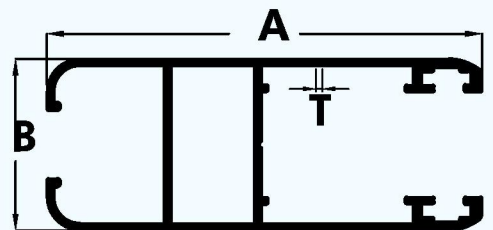

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 302        | 66.10 | 26.14 | 1.40 | 2.800/3.000 |
| 302-2      | 66.10 | 26.14 | 1.30 | 2.700/3.900 |

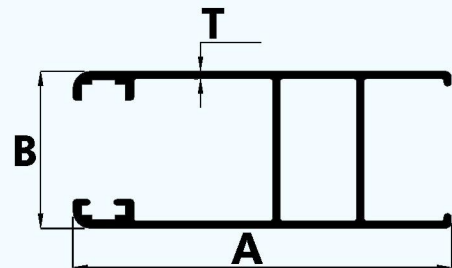


| SECTION NO | A  | B  | T   | WEIGHT\12FT |
|------------|----|----|-----|-------------|
| 303        | 65 | 27 | 1.3 | 2.700/2.900 |
|            |    |    |     |             |

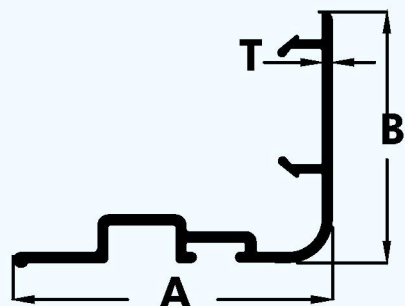


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 303        | 66.10 | 26.14 | 1.00 | 0.900/1.100 |

KITCHEN FRAME 45MM

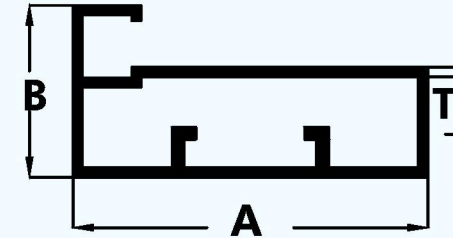

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1265       | 44.20 | 21.40 | 1.20 | 1.600/1.700 |


KITCHEN FRAME 65MM

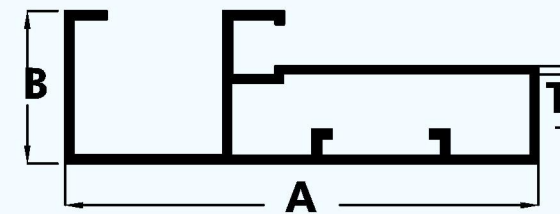

SECTION NO - RAEC1266

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1266       | 66.40 | 21.40 | 1.21 | 1.800/1.900 |


G PROFILE

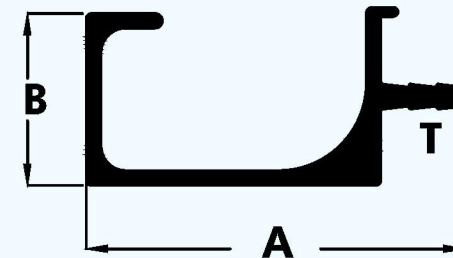

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1103       | 45.00 | 20.40 | 1.50 | 1.200/1.300 |


FURNITURE TRACK

PROFILE TRACK

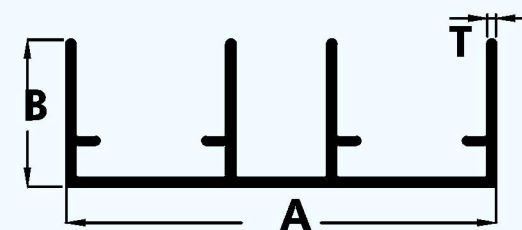

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1105       | 58.50 | 20.00 | 1.20 | 2.100/2.200 |
| 1105-1     | 58.50 | 20.00 | 0.80 | 1.800/1.900 |


SECTION NO - RAEC1106

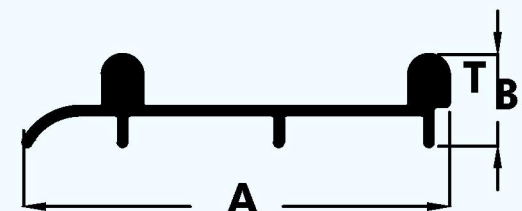


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1106       | 49.06 | 10.60 | 1.20 | 1.40/1.50   |




22MM FOLDING SLIDING SERIES

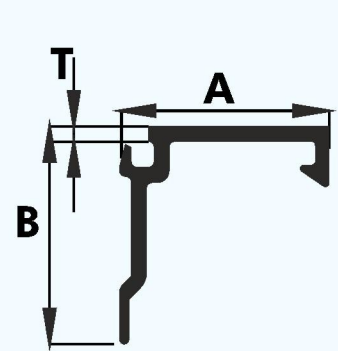


| SECTION NO | A    | B     | T    | WEIGHT\12FT |
|------------|------|-------|------|-------------|
| 3301       | 17.9 | 18.60 | 1.30 | 0.550/0.600 |

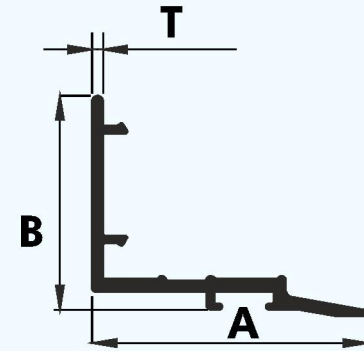


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 3302       | 34.07 | 26.49 | 1.35 | 0.930/1.000 |

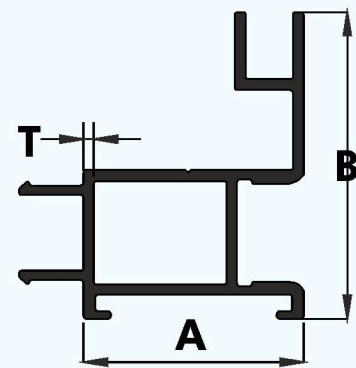


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 3303       | 28.00 | 39.00 | 1.30 | 1.950/2.100 |

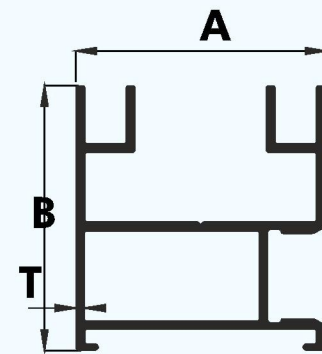


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 3304       | 34.07 | 26.49 | 1.35 | 0.930/1.00  |

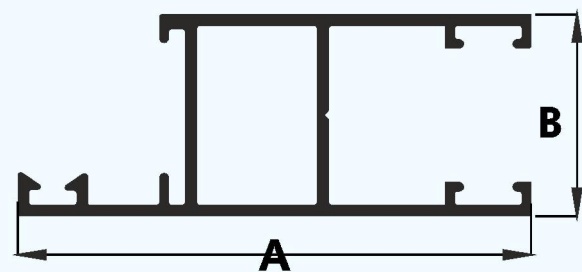


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 5007       | 56.00 | 22.00 | 1.32 | 1.950/2.100 |




| SECTION NO | A    | B     | T    | WEIGHT\12FT |
|------------|------|-------|------|-------------|
| 3306       | 6.10 | 11.06 | 1.59 | 0.450/0.600 |

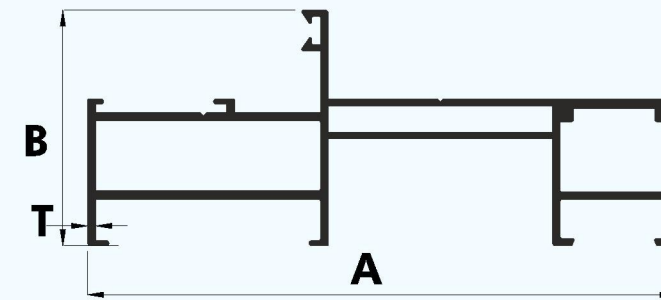


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 5002       | 110.00 | 44.05 | 1.50 | 5.100/5.300 |

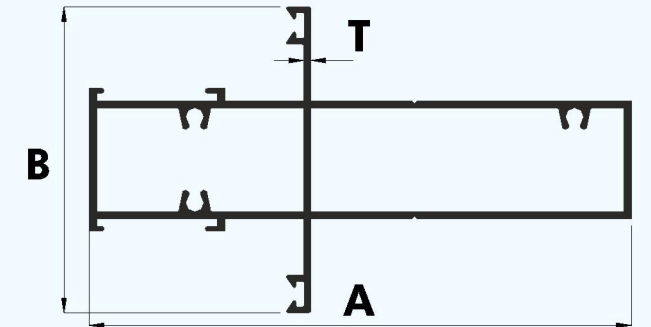


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 5004       | 110.00 | 62.10 | 1.50 | 5.300/5.400 |

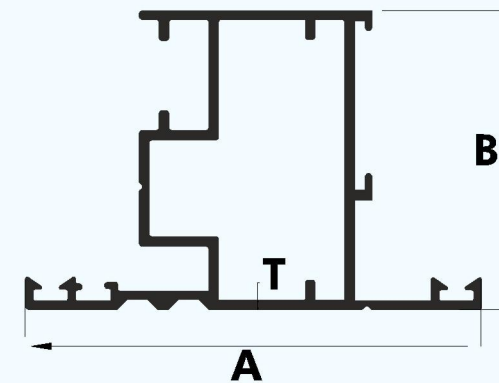


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 5003       | 68.81 | 45.00 | 1.40 | 3.500/3.700 |

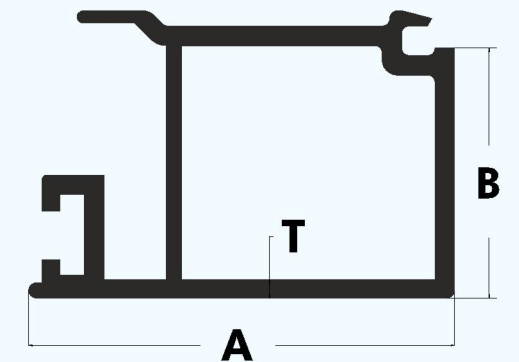

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 5006       | 28.20 | 16.55 | 1.20 | 1.200/1.300 |

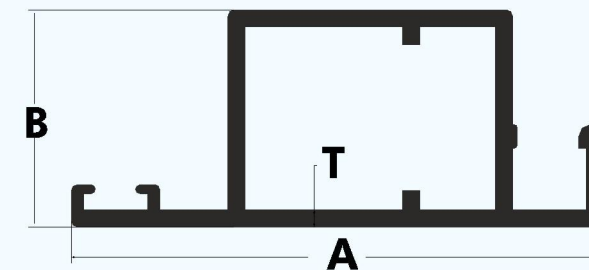


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 5005       | 45.00 | 20.00 | 1.40 | 3.500/3.700 |

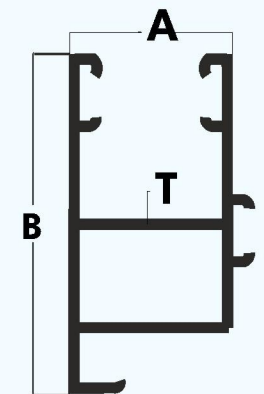


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 3305       | 22.00 | 45.00 | 1.20 | 1.800/2.300 |




40MM OPENABEL SERIES

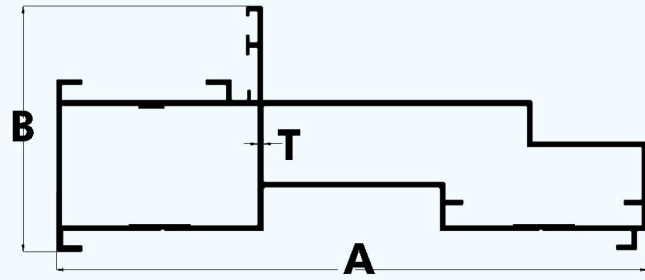


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| R57        | 114.00 | 47.40 | 1.20 | 3.776/3.900 |

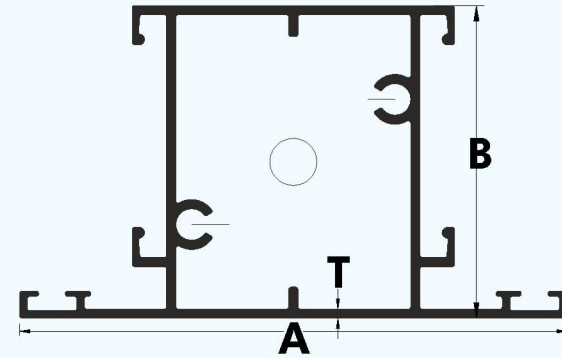


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| r56        | 70.00 | 40.00 | 1.20 | 2.884/3.00  |

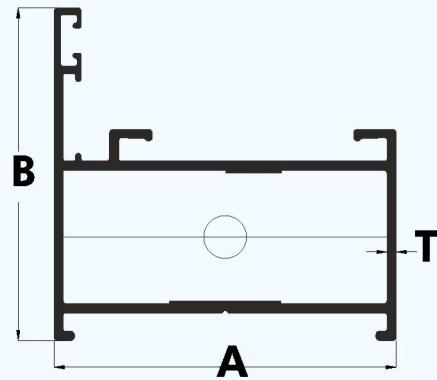

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| R58        | 40.00 | 38.90 | 1.10 | 1.800/1.900 |

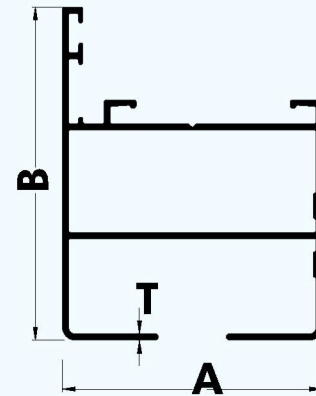


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| R55        | 40.00 | 51.20 | 1.00 | 2.100/2.200 |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| gp01       | 50.00 | 50.00 | 2.00 | 5.900/6.100 |




| SECTION NO | A     | B    | T    | WEIGHT\12FT |
|------------|-------|------|------|-------------|
| 1348       | 50.00 | 8.00 | 1.10 | 0.900/1.100 |

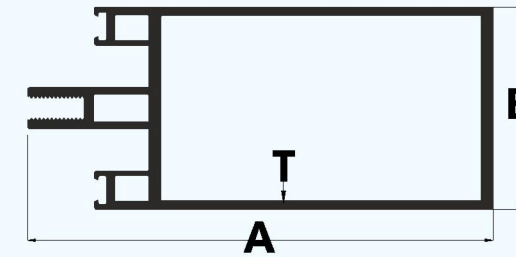


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 1350       | 115.00 | 50.00 | 2.20 | 8.500/8.700 |

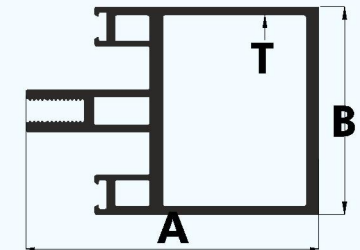


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1351       | 70.50 | 50.00 | 2.00 | 6.700/6.900 |

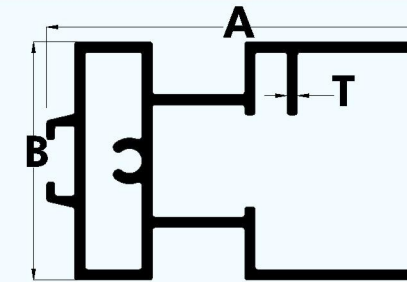


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1501-3     | 41.00 | 25.70 | 1.20 | 1.800/2.000 |

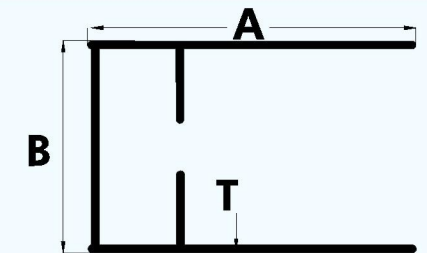


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1501-1     | 45.00 | 29.00 | 1.10 | 1.400/1.600 |




| SECTION NO | A     | B    | T    | WEIGHT\12FT |
|------------|-------|------|------|-------------|
| 1501-4     | 25.50 | 25.5 | 1.10 | 1.500/1.700 |

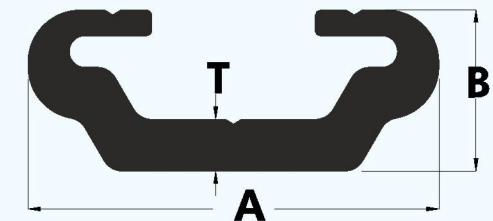

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| P 01       | 39.50 | 15.50 | 5.00 | 2.800/3.000 |
| P 01-1     | 39.50 | 15.50 | 5.00 | 2.800/3.000 |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1501-2     | 25.50 | 25.50 | 1.10 | 1.500/1.700 |

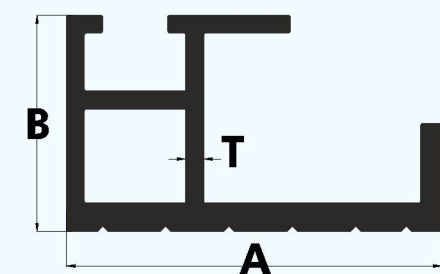


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| P02        | 52.00 | 30.00 | 2.50 | 5.100/5.300 |


SOLAR FRAME

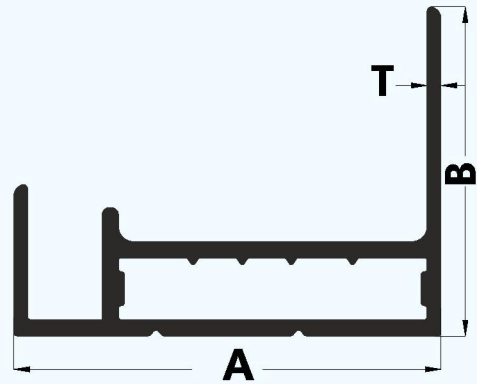


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| S01        | 35.00 | 27.00 | 1.15 | 1.400/1.500 |

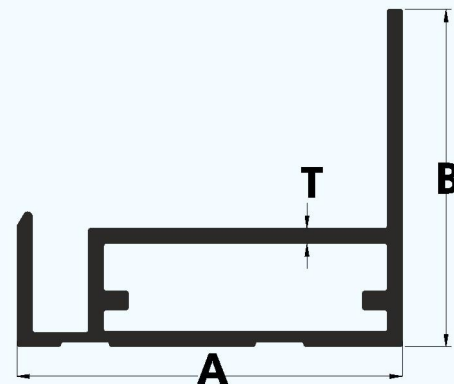


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| S02        | 40.00 | 35.00 | 1.60 | 2.00/2.100  |

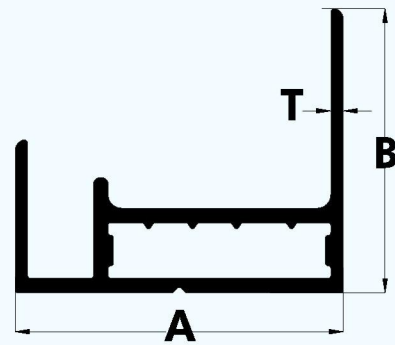


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| S03        | 30.00 | 26.00 | 1.15 | 1.250/1.350 |

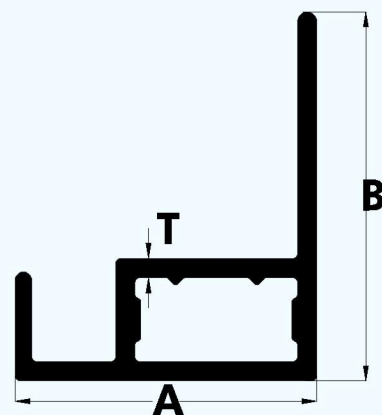

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| S04        | 18.00 | 22.00 | 1.20 | 0.800/0.900 |

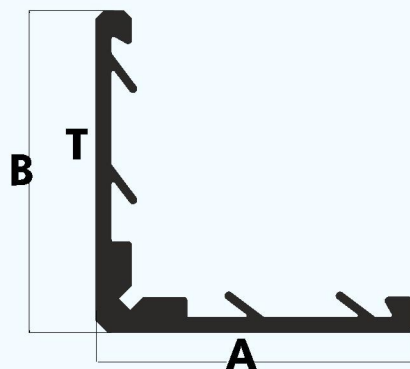


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| S05        | 40.00 | 40.00 | 1.90 | 2.200/2.300 |

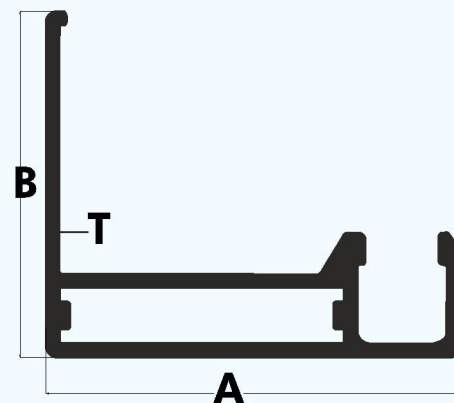


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-17    | 30.00 | 25.00 | 1.00 | 1.00/1.100  |


SOLAR INDUSTRY STRUCTURE

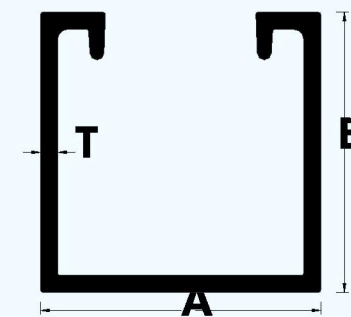


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| Se 01      | 41.00 | 41.00 | 2.80 | 3.650/3.850 |
| Se 05      | 41.00 | 41.00 | 2.50 | 3.400/3.600 |
| 1349       | 41.00 | 26.00 | 3.00 | 3.200/3.400 |
| 1349-1     | 41.00 | 26.00 | 2.50 | 2.550/2.750 |

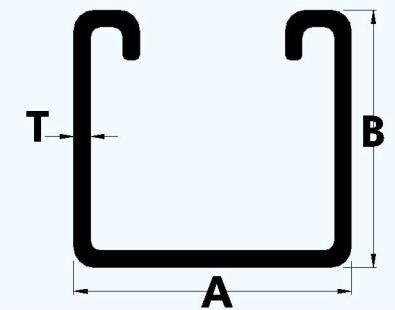


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1349-2     | 41.00 | 38.00 | 3.00 | 3.900/4.100 |
| 1349-4     | 41.00 | 38.00 | 2.60 | 3.200/3.400 |
| 1401-9     | 41.00 | 38.00 | 2.50 | 3.100/3.300 |

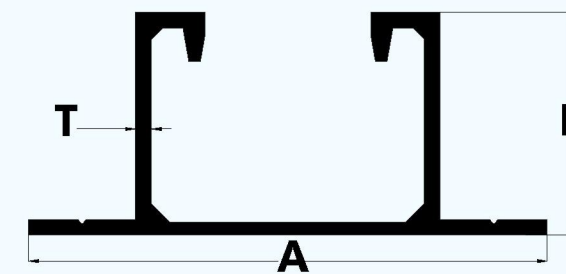


| SECTION NO | A     | B    | T   | WEIGHT\12FT |
|------------|-------|------|-----|-------------|
| 1401       | 68.00 | 29.2 | 2.1 | 2.900/3.100 |
| Sc 03      | 68.00 | 29.2 | 2.1 | 2.900/3.100 |

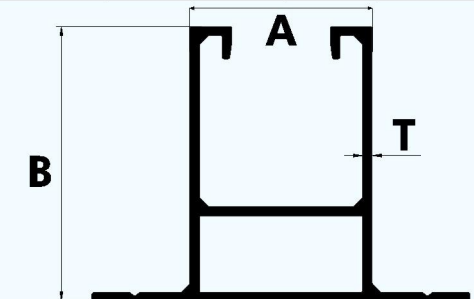


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| SE 04      | 41.00 | 61.00 | 2.50 | 5.300/5.500 |
| SE 06      |       |       |      | 4.700/4.900 |

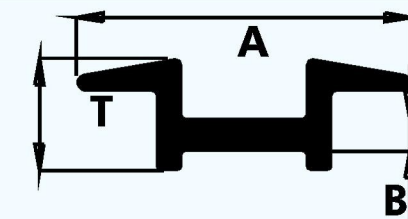

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| SE 02      | 38.00 | 12.80 | 3.80 | 1.700/1.900 |
| 3308       | 38.00 | 12.80 | 3.80 | 1.700/1.900 |




| SECTION NO | A     | B     | T   | WEIGHT\12FT |
|------------|-------|-------|-----|-------------|
| 5008       | 26.00 | 38.00 | 2.8 | 3.200/3.400 |



| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 3307       | 23.00 | 38.00 | 3.00 | 1.900/2.100 |
| 3307-1     | 23.00 | 38.00 | 2.80 | 1.900/2.100 |
| 3307-2     | 23.00 | 40.00 | 2.80 | 2.00/2.200  |




## ARCHITECTURAL

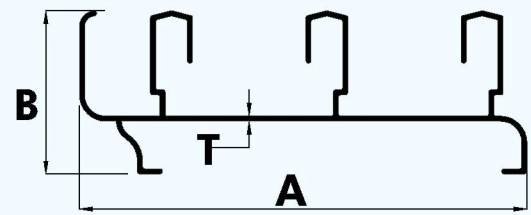


### 20MM SLIDING SERIES


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| D51        | 85.85 | 31.31 | 1.00 | 2.400/2.500 |

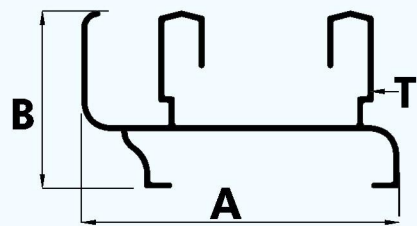

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| D52        | 56.06 | 31.31 | 1.00 | 1.700/1.900 |

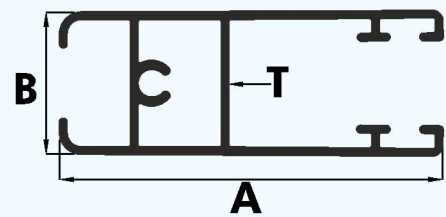

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| D54        | 54.55 | 20.20 | 1.00 | 1.800/1.900 |

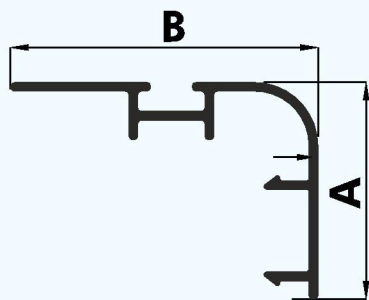


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| D53        | 24.24 | 34.34 | 1.00 | 0.770/0.900 |
| zDc3       | 24.24 | 34.34 | 1.00 | 0.770/0.900 |




## ARCHITECTURAL




SOLAR INDUSTRY STRUCTURE




| SECTION NO | A   | B    | T    | WEIGHT\12FT |
|------------|-----|------|------|-------------|
| MT 1401-13 | 9.0 | 15.0 | 3.00 | 1.100/1.300 |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| MT 1401-11 | 45.00 | 40.00 | 2.00 | 3.00/3.200  |
| MT 1401-12 | 32.00 | 37.00 | 2.00 | 2.400/2.600 |
| R66        | 25.00 | 25.00 | 1.40 | 1.800/2.000 |

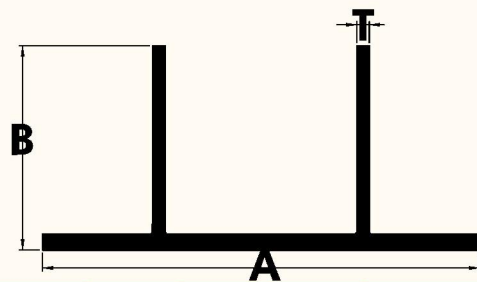


| SECTION NO | A      | B     | T    | WEIGHT\12FT   |
|------------|--------|-------|------|---------------|
| 1401-10    | 139.00 | 65.00 | 4.00 | 11.500/11.700 |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-15    | 57.00 | 75.00 | 2.00 | 5.200/5.400 |



| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-14    | 70.00 | 70.00 | 2.40 | 4.00/4.200  |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| OLD 1401-8 | 53.00 | 35.00 | 1.90 | 3.500/3.700 |

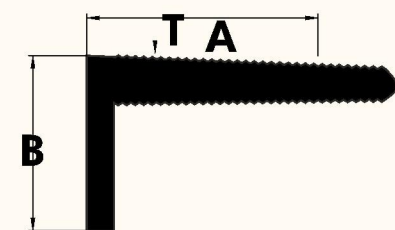


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-6     | 75.00 | 40.00 | 8.00 | 8.100/8.300 |

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-7     | 50.00 | 50.00 | 5.00 | 4.700/4.900 |


SOLAR INDUSTRY STRUCTURE

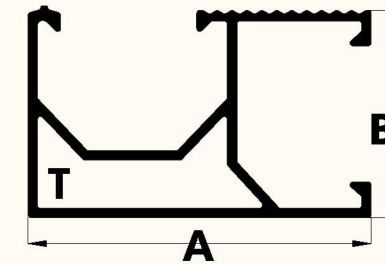


| SECTION NO  | A     | B     | T    | WEIGHT\12FT |
|-------------|-------|-------|------|-------------|
| IBR 1401-16 | 46.00 | 27.80 | 1.30 | 2.200/2.400 |

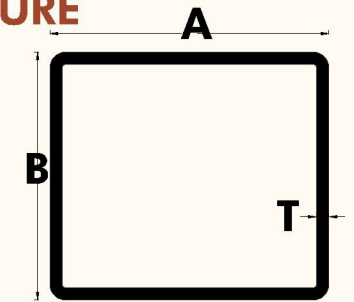


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| MT 1401-11 | 45.00 | 40.00 | 2.00 | 3.200/3.400 |
| MT 1401-12 | 32.00 | 37.00 | 2.00 | 2.900/3.100 |

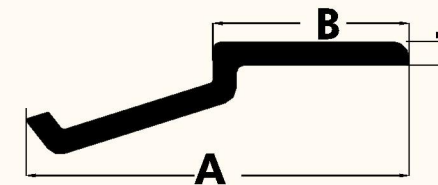


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1501-5     | 48.60 | 24.90 | 3.00 | 1.600/1.800 |

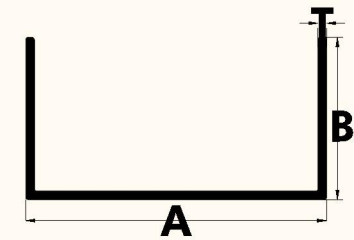


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-2     | 65.00 | 35.00 | 1.90 | 2.400/2.600 |

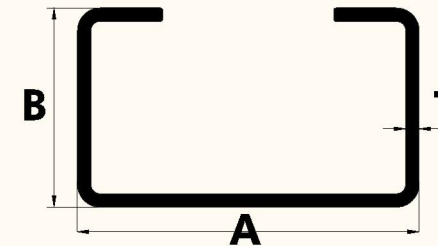


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-5     | 60.00 | 35.00 | 2.40 | 3.400/3.600 |

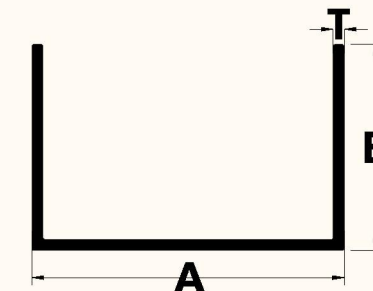

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-4     | 53.00 | 35.00 | 1.90 | 2.200/2.400 |

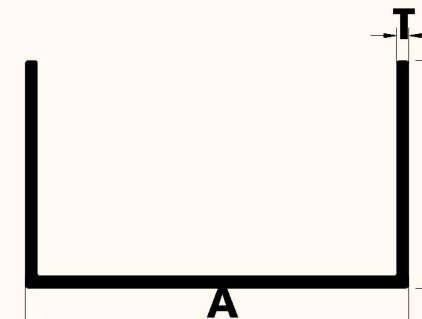


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-3     | 59.00 | 35.00 | 1.90 | 2.300/2.500 |

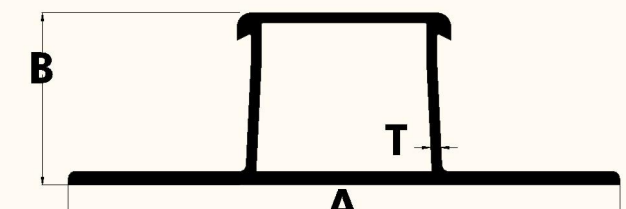


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1401-1     | 80.00 | 25.00 | 1.50 | 2.700/2.900 |


## LED SERIES

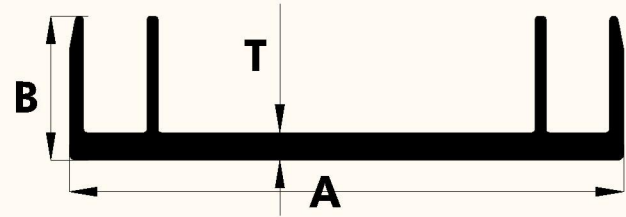


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1400-1     | 50.00 | 13.00 | 2.50 | 1.600/1.800 |

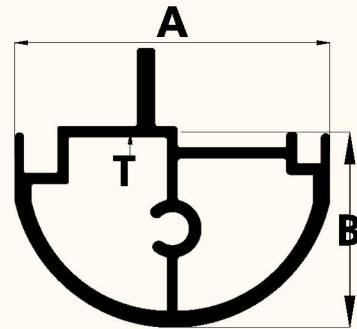


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1400       | 49.50 | 35.50 | 1.80 | 3.800/4.000 |

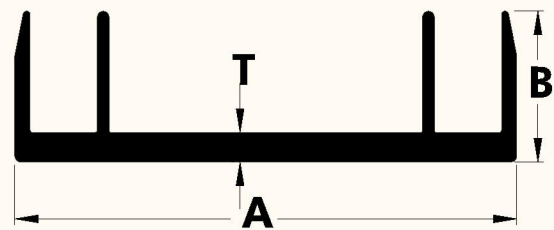


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1402-1     | 42.60 | 12.80 | 2.50 | 1.500/1.700 |

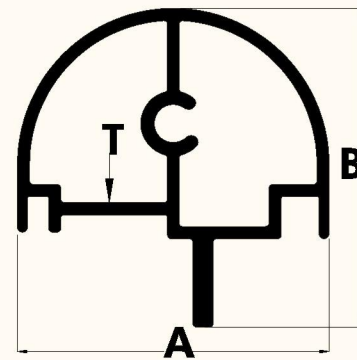

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1402       | 43.00 | 44.00 | 2.00 | 3.700/3.900 |

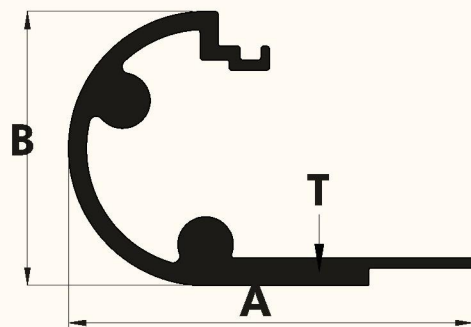


| SECTION NO | A     | B     | T   | WEIGHT\12FT |
|------------|-------|-------|-----|-------------|
| PH 01      | 58.35 | 43.00 | 4.0 | 3.800/4.000 |

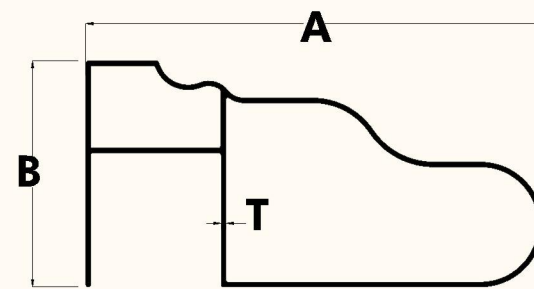


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| YE 01      | 75.00 | 37.10 | 0.80 | 1.900/2.100 |


## INDUSTRY SERIES

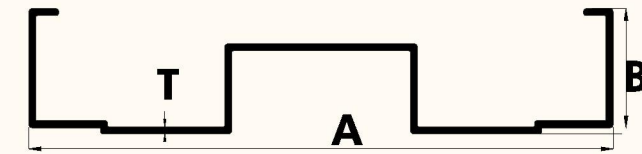


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 1259       | 100.00 | 20.00 | 2.50 | 3.900/4.100 |
| SKY-05     | 50.00  | 20.00 | 2.50 | 2.800/3.000 |
| SKY1257    | 50.00  | 20.00 | 1.00 | 1.400/1.500 |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| SKY 04     | 50.00 | 49.00 | 1.50 | 3.000/3.200 |

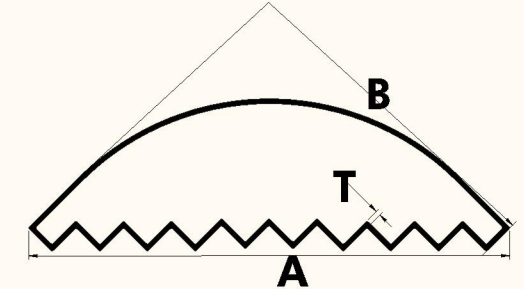


| SECTION NO | A      | B      | T     | WEIGHT\12FT |
|------------|--------|--------|-------|-------------|
| SKY 03     | 143.85 | 102.01 | 1.515 | 5.700/5.900 |

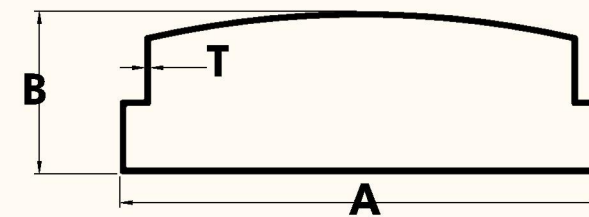


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| SKY 02     | 98.00 | 33.00 | 1.20 | 3.200/3.400 |

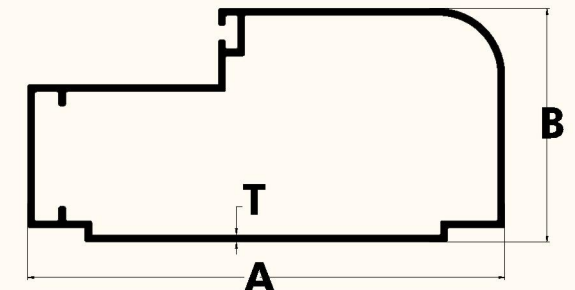

| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| SKY 01     | 100.00 | 49.00 | 1.50 | 4.400/4.600 |

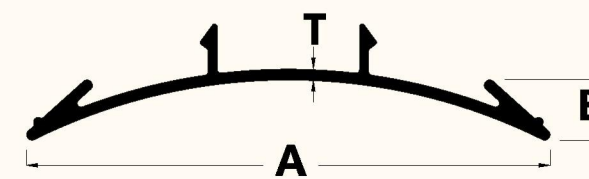


| SECTION NO | A     | B    | T    | WEIGHT\12FT |
|------------|-------|------|------|-------------|
| SKY 07     | 56.20 | 6.50 | 1.20 | 0.900/1.100 |

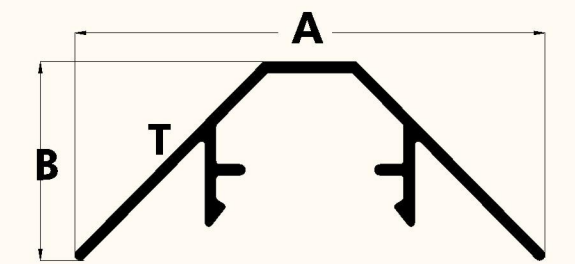


| SECTION NO | A    | B    | T    | WEIGHT\12FT |
|------------|------|------|------|-------------|
| SKY 06     | 51.4 | 21.7 | 1.20 | 1.100/1.300 |




INDUSTRY SERIES




| SECTION NO | A     | B    | T    | WEIGHT\12FT |
|------------|-------|------|------|-------------|
| I 013      | 79.20 | 6.70 | 1.20 | 1.400/1.500 |

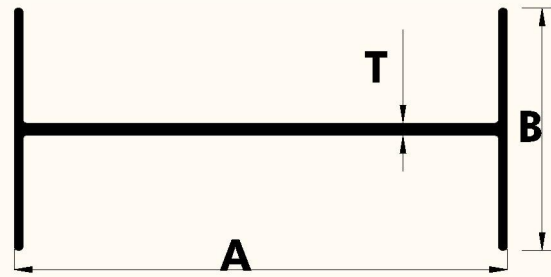


| SECTION NO | A     | B     | T   | WEIGHT\12FT |
|------------|-------|-------|-----|-------------|
| I 011      | 55.00 | 27.00 | 1.4 | 1.250/1.350 |

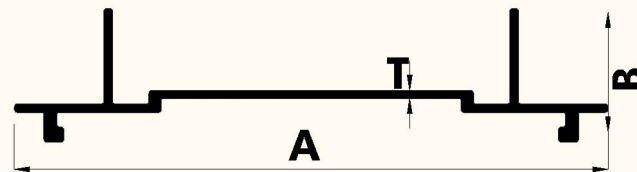


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| I 015      | 79.70 | 18.00 | 1.10 | 1.450/1.550 |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1258       | 74.00 | 10.00 | 1.00 | 1.100/1.200 |

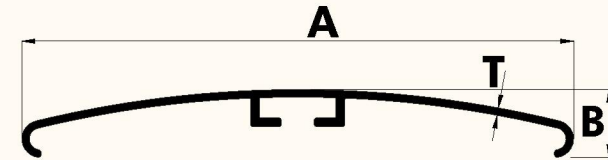


| SECTION NO | A    | B     | T    | WEIGHT\12FT |
|------------|------|-------|------|-------------|
| I 012      | 86.0 | 10.58 | 1.20 | 1.300/1.400 |

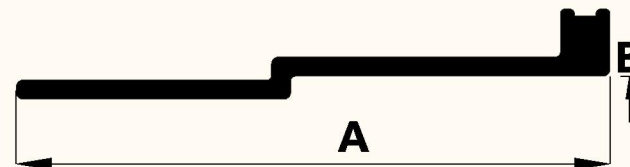

| SECTION NO | A     | B    | T   | WEIGHT\12FT |
|------------|-------|------|-----|-------------|
| I 014      | 33.50 | 3.80 | 1.1 | 0.450/0.550 |

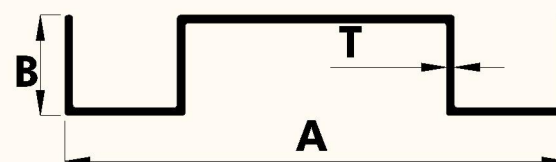


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1257-1     | 50.00 | 10.00 | 0.80 | 0.680/0.780 |




| SECTION NO | A    | B    | T    | WEIGHT\12FT |
|------------|------|------|------|-------------|
| I 017      | 7.50 | 7.00 | 1.00 | 0.300/0.400 |


V CLIP

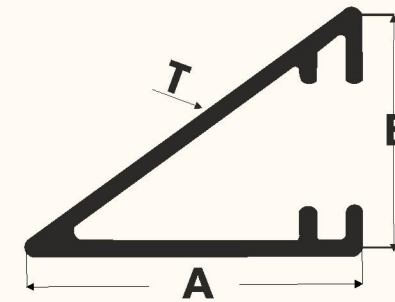


| SECTION NO | A    | B    | T    | WEIGHT\12FT |
|------------|------|------|------|-------------|
| 1256       | 17.6 | 13.0 | 0.80 | 0.370/0.390 |

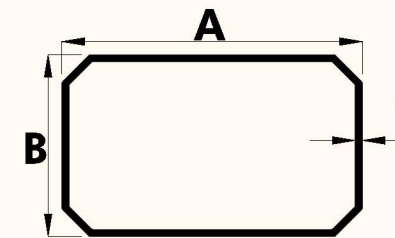


| SECTION NO | A    | B    | T    | WEIGHT\12FT |
|------------|------|------|------|-------------|
| 1128       | 33.0 | 20.0 | 0.80 | 0.370/0.390 |

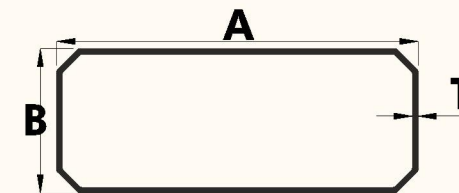

| SECTION NO | A    | B    | T    | WEIGHT\12FT |
|------------|------|------|------|-------------|
| 1129       | 50.0 | 20.0 | 0.80 | 0.370/0.390 |




| SECTION NO | A    | B    | T   | WEIGHT\12FT |
|------------|------|------|-----|-------------|
| G1-1       | 98.0 | 16.0 | 0.9 | 1.30/1.40   |

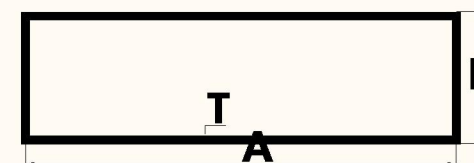


| SECTION NO | A     | B    | T   | WEIGHT\12FT |
|------------|-------|------|-----|-------------|
| 1129-1     | 95.25 | 20.0 | 1.5 | 3.30/3.60   |

| SECTION NO | A      | B    | T   | WEIGHT\12FT |
|------------|--------|------|-----|-------------|
| 1129-2     | 137.00 | 20.0 | 2.0 | 8.000/8.200 |




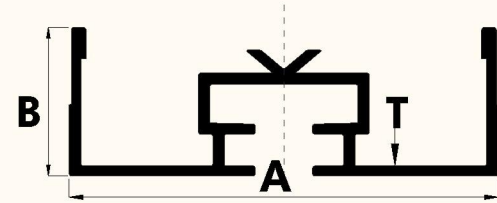


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| ATC 3      | 75.75 | 26.26 | 1.50 | 3.700/3.900 |

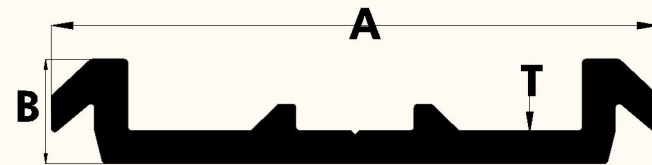


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| ATC 1      | 50.00 | 12.00 | 3.00 | 2.800/3.000 |
| ATC 2      | 70.00 | 12.00 | 3.00 | 3.400/3.600 |

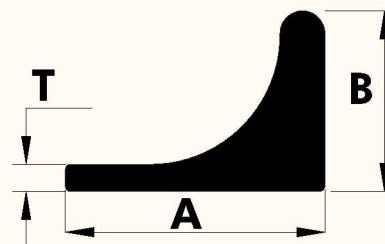


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| R68        | 23.00 | 16.00 | 2.40 | 1.400/1.600 |




| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| R70        | 13.33 | 17.88 | 2.83 | 1.200/1.300 |

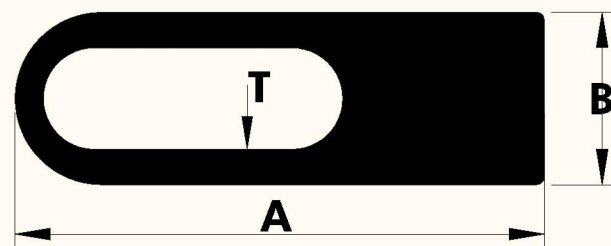


| SECTION NO | A     | B     | T | WEIGHT\12FT |
|------------|-------|-------|---|-------------|
| R72        | 37.52 | 12.22 |   | 2.900/3.000 |

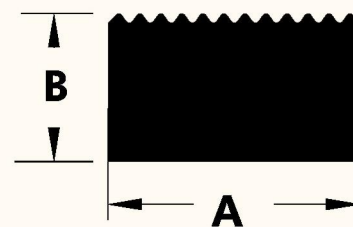

| SECTION NO    | A    | B    | T    | WEIGHT\12FT |
|---------------|------|------|------|-------------|
| H 70,71,72,73 | 9.70 | 5.70 | 5.70 | 0.600/0.650 |

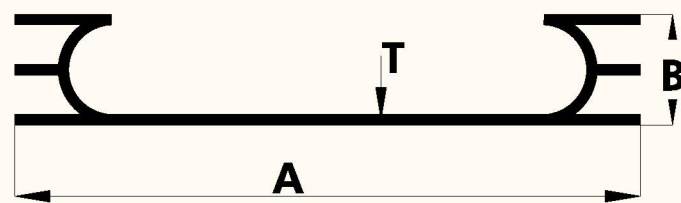


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1303       | 44.10 | 18.00 | 1.40 | 1.600/1.700 |

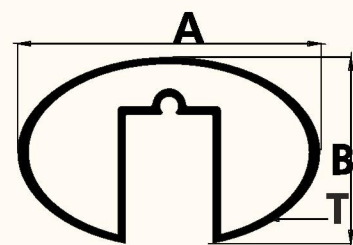


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| h05        | 69.43 | 42.66 | 1.80 | 4.200/4.400 |

## KITCHEN FRAME 45MM

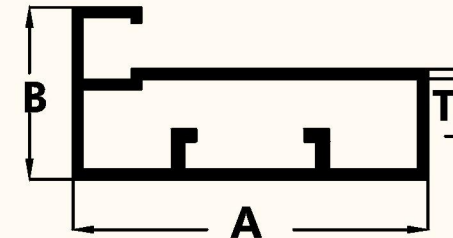

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1265       | 44.20 | 21.40 | 1.20 | 1.600/1.700 |

## KITCHEN FRAME 65MM

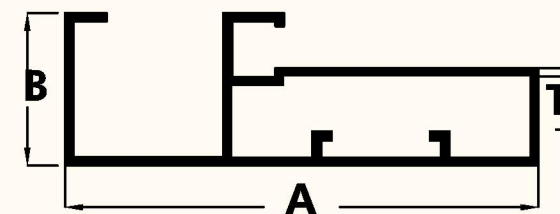

## SECTION NO - RAEC1266

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1266       | 66.40 | 21.40 | 1.21 | 1.800/1.900 |


## G PROFILE



| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1103       | 45.00 | 20.40 | 1.50 | 1.200/1.300 |


## FURNITURE TRACK

### PROFILE TRACK

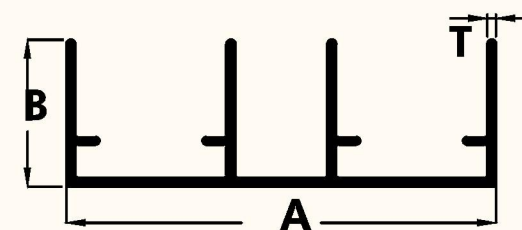


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1105       | 58.50 | 20.00 | 1.20 | 2.100/2.200 |
| 1105-1     | 58.50 | 20.00 | 0.80 | 1.800/1.900 |


## SECTION NO - RAEC1106

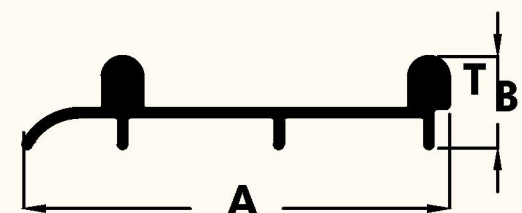


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1106       | 49.06 | 10.60 | 1.20 | 1.40/1.50   |

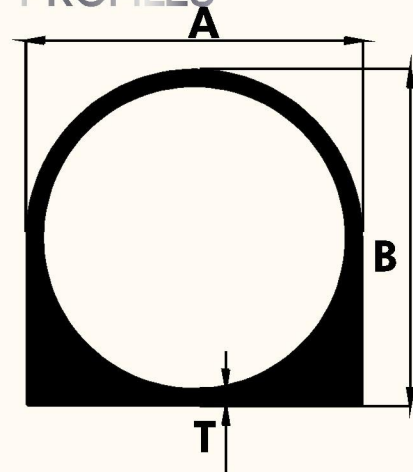


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| 1275       | 62.00 | 47.00 | 7.00 | 6.000/6.500 |

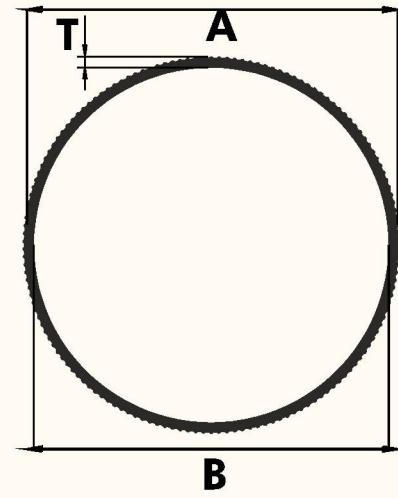


| SECTION NO | A      | B     | T    | WEIGHT\12FT |
|------------|--------|-------|------|-------------|
| 1231       | 105.00 | 99.00 | 3.00 | 4.500/5.000 |

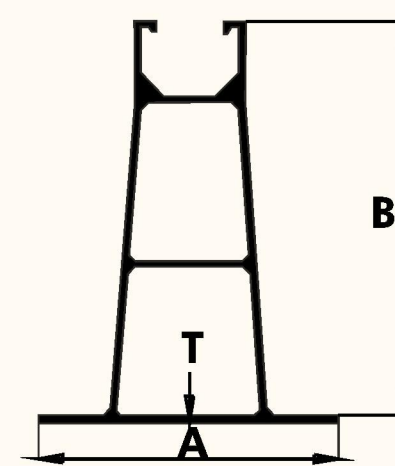

| SECTION NO | A     | B      | T    | WEIGHT\12FT |
|------------|-------|--------|------|-------------|
| Mt1401-17  | 80.00 | 100.00 | 1.50 | 6.400/6.600 |

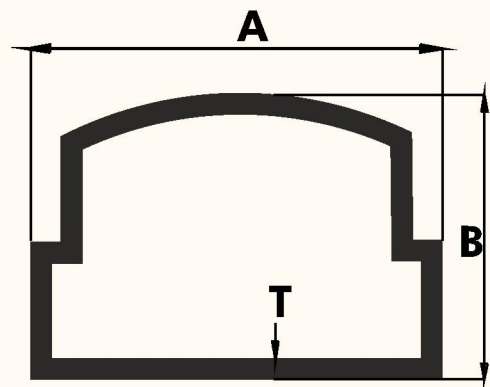


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| SKY 11     | 50.00 | 35.00 | 1.20 | 2.100/2.300 |

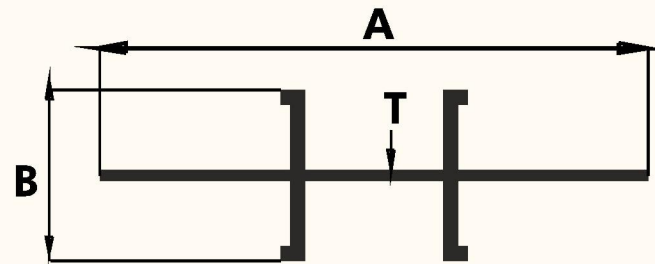


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| SKY 10     | 45.00 | 28.00 | 1.00 | 1.400/1.600 |
| SKY 09     | 92.00 | 28.00 | 1.00 | 2.000/2.200 |

### FZUTED PIPE


| SECTION NO | THICKNESS | WEIGHT RANGE/12FT |
|------------|-----------|-------------------|
| RAEC 1231  | 3         | 8.6/9.0           |

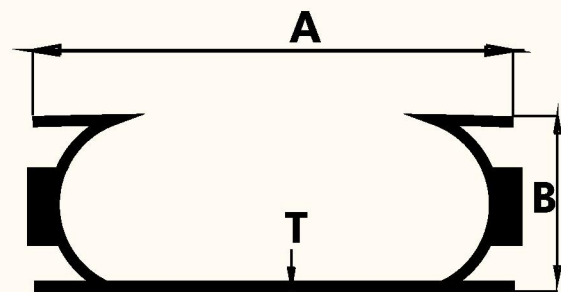


| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| SKY        | 55.75 | 55.75 | 3.00 | 1.400/1.600 |

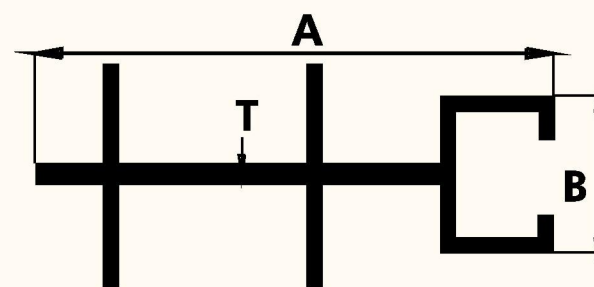

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| SKY 08     | 65.00 | 28.00 | 1.50 | 2.00/2.200  |

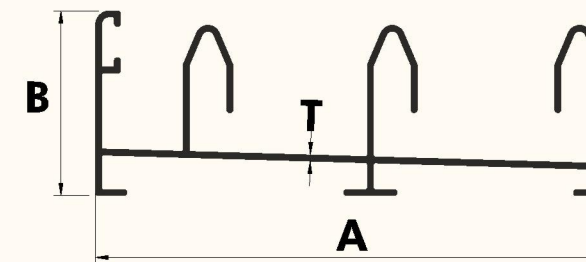

| SECTION NO | A     | B     | T    | WEIGHT\12FT |
|------------|-------|-------|------|-------------|
| ZDC1       | 81.50 | 29.60 | 1.00 | 2.500/2.700 |

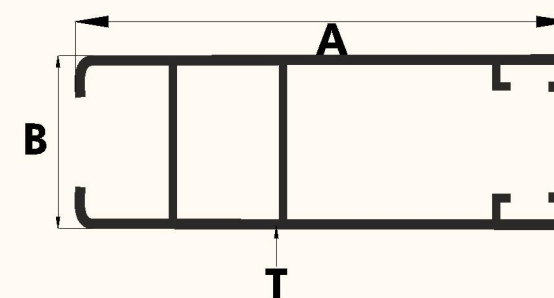

| SECTION NO | A    | B    | T    | WEIGHT\12FT |
|------------|------|------|------|-------------|
| ZDC2       | 60.2 | 21.2 | 1.20 | 2.000/2.100 |






## Frameless Top Mount

### Essential

#### Step Bracket & Cover - RAB 01

|                 |                                                                                        |
|-----------------|----------------------------------------------------------------------------------------|
| <b>Type</b>     | : Bracket & Cover System                                                               |
| <b>Use</b>      | : Indoor & Outdoor                                                                     |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                                              |
| <b>Length</b>   | : Step Bracket (65mm) Step Cover (13 ft./16 ft.)                                       |
| <b>Weight</b>   | : Step Bracket (Approx 0.460 gm.) Step Cover (Approx 0.200/0.220 gm.) (1 ft. / 1 side) |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating                                    |

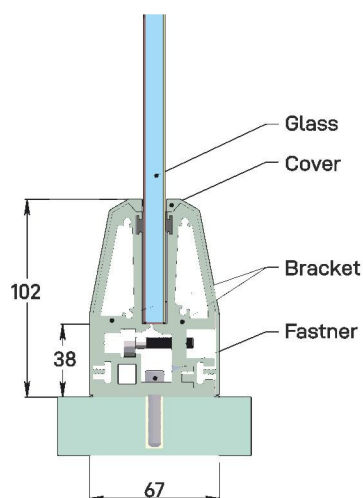

End Cap

Slotted Cap



**Glass : 12 mm**

#### Recommended Railing Length Chart

| Glass Height   | Balcony Length |       |       |           |
|----------------|----------------|-------|-------|-----------|
| <b>24 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>30 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>36 inch</b> | 10 ft          | 20 ft |       |           |
| <b>42 inch</b> | 10 ft          |       |       |           |

Bracket will be fitted at every 2 feet







## Frameless Top Mount

### Essential

#### Square Bracket & Cover - RAB 02

|                 |                                                                                      |
|-----------------|--------------------------------------------------------------------------------------|
| <b>Type</b>     | : Bracket & Cover System                                                             |
| <b>Use</b>      | : Indoor & Outdoor                                                                   |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                                            |
| <b>Length</b>   | : Square Bracket (65mm) Square Cover (13 ft./16 ft.)                                 |
| <b>Weight</b>   | : Square Bracket (Approx 0.250 gm.) Square Cover (Approx 0.180 gm.) (1 ft. / 1 side) |
| <b>Epdm</b>     | : 0.020 gm. (1 ft.)                                                                  |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating                                  |

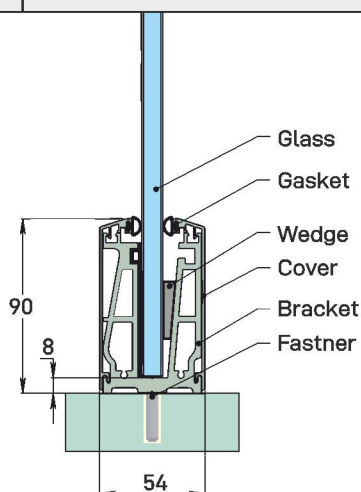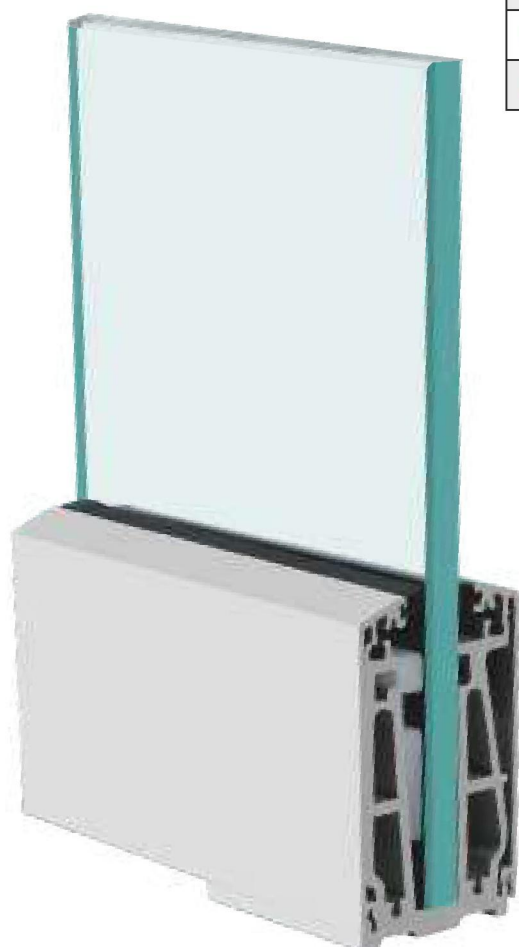

End Cap

Slotted Cap



Glass : 12 mm

#### Recommended Railing Length Chart

| Glass Height | Balcony Length |       |       |           |
|--------------|----------------|-------|-------|-----------|
| 24 inch      | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch      | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch      | 10 ft          | 20 ft | 30 ft |           |
| 42 inch      | 10 ft          |       |       |           |

Bracket will be fitted at every 2 feet




## Frameless Top Mount

### Essential

#### New Step Bracket & Cover - RAB 03

|                 |                                                                                          |
|-----------------|------------------------------------------------------------------------------------------|
| <b>Type</b>     | : Bracket & Cover System                                                                 |
| <b>Use</b>      | : Indoor & Outdoor                                                                       |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                                                |
| <b>Length</b>   | : Step Bracket (65mm) Step Cover (13 ft./16 ft.)                                         |
| <b>Weight</b>   | : Heavy Bracket (Approx 0.240 gm.) Heavy Cover (Approx 0.180/0.200 gm.) (1 ft. / 1 side) |
| <b>Epdm</b>     | : 0.020 gm. (1 ft.)                                                                      |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating                                      |

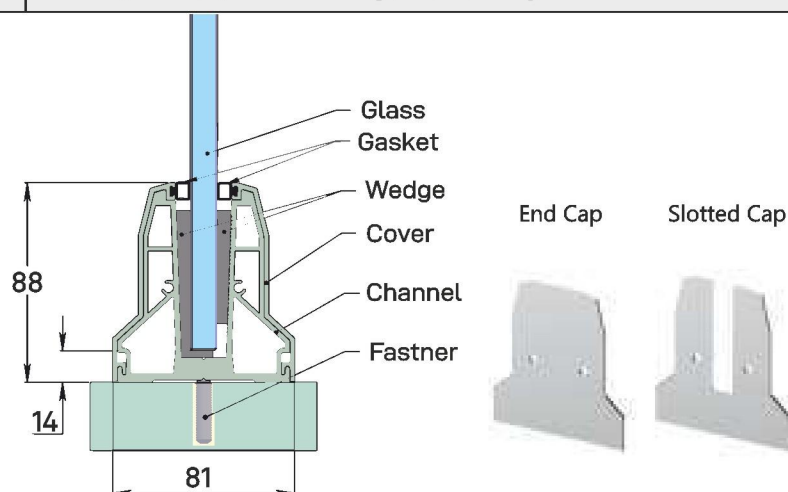

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 42 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| Bracket will be fitted at every 2 feet |                |       |       |           |







## Frameless Top Mount

### Essential

#### New Step Bracket & Cover - RAB 04

|                 |                                                                                          |
|-----------------|------------------------------------------------------------------------------------------|
| <b>Type</b>     | : Bracket & Cover System                                                                 |
| <b>Use</b>      | : Indoor & Outdoor                                                                       |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                                                |
| <b>Length</b>   | : Heavy Bracket (65mm) Heavy Cover (13 ft./16 ft.)                                       |
| <b>Weight</b>   | : Heavy Bracket (Approx 0.240 gm.) Heavy Cover (Approx 0.170/0.190 gm.) (1 ft. / 1 side) |
| <b>Epdm</b>     | : 0.020 gm. (1 ft.)                                                                      |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating                                      |

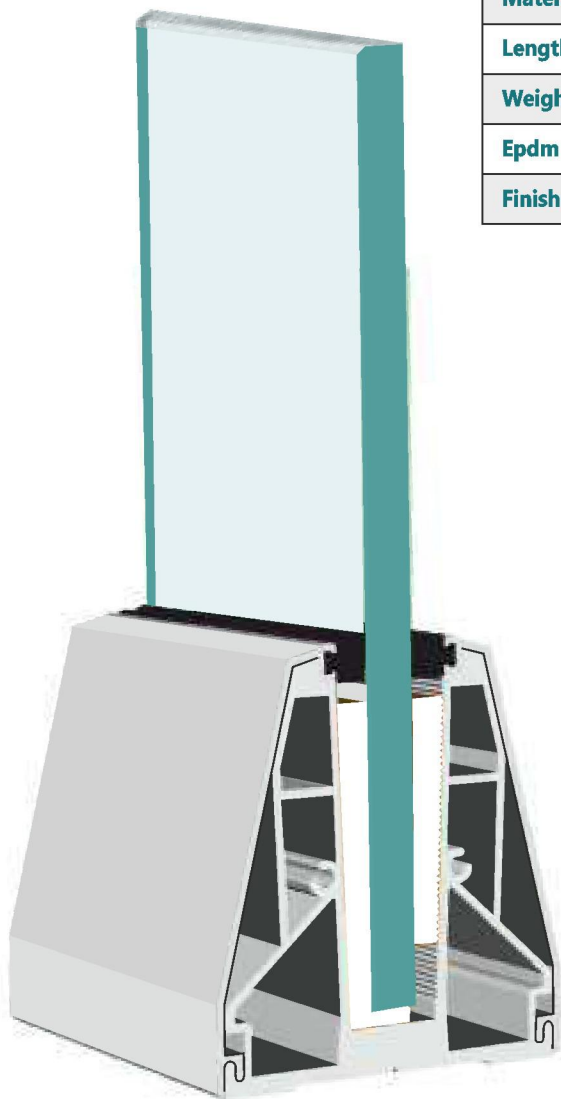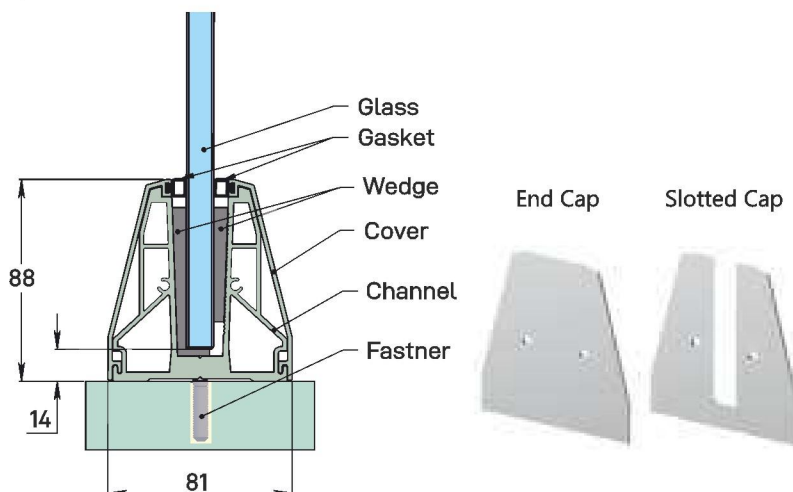

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| <b>24 inch</b>                         | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>30 inch</b>                         | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>36 inch</b>                         | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>42 inch</b>                         | 10 ft          | 20 ft | 30 ft | Unlimited |
| Bracket will be fitted at every 2 feet |                |       |       |           |






## Frameless Top Mount

### Essential

#### Heavy Round Bracket & Cover - RAB 05

|                 |                                                                                          |
|-----------------|------------------------------------------------------------------------------------------|
| <b>Type</b>     | : Bracket & Cover System                                                                 |
| <b>Use</b>      | : Indoor & Outdoor                                                                       |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                                                |
| <b>Length</b>   | : Round Bracket (65mm) Round Cover (13 ft./16 ft.)                                       |
| <b>Weight</b>   | : Round Bracket (Approx 0.480 gm.) Round Cover (Approx 0.220/0.240 gm.) (1 ft. / 1 side) |
| <b>Epdm</b>     | : 0.020 gm. (1 ft.)                                                                      |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating                                      |

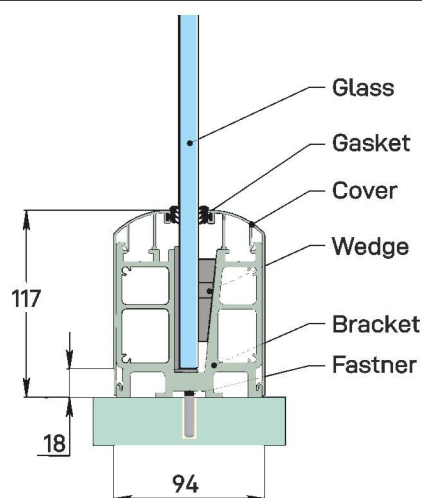

End Cap

Slotted Cap



| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 42 inch                                | 10 ft          | 20 ft | 30 ft |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### Heavy Square Bracket & Cover - RAB 06

|                 |                                                                                                        |
|-----------------|--------------------------------------------------------------------------------------------------------|
| <b>Type</b>     | : Bracket & Cover System                                                                               |
| <b>Use</b>      | : Indoor & Outdoor                                                                                     |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                                                              |
| <b>Length</b>   | : Heavy Square Bracket (65mm) Heavy Square Cover (13 ft./16 ft.)                                       |
| <b>Weight</b>   | : Heavy Square Bracket (Approx 0.480 gm.) Heavy Square Cover (Approx 0.200/0.220 gm.) (1 ft. / 1 side) |
| <b>Epdm</b>     | : 0.020 gm. (1 ft.)                                                                                    |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating                                                    |

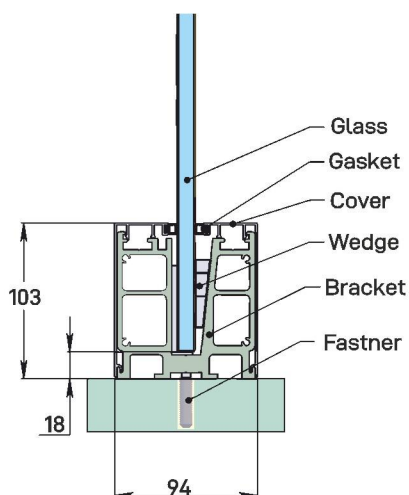

End Cap

Slotted Cap



**Glass : 12 mm**

#### Recommended Railing Length Chart

| Glass Height   | Balcony Length |       |       |           |
|----------------|----------------|-------|-------|-----------|
| <b>24 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>30 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>36 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>42 inch</b> | 10 ft          | 20 ft | 30 ft |           |

Bracket will be fitted at every 2 feet






## Frameless Top Mount

### Essential

#### Regular Feri - RAB 07

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.780/0.800 gm.) (1 ft.)                  |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

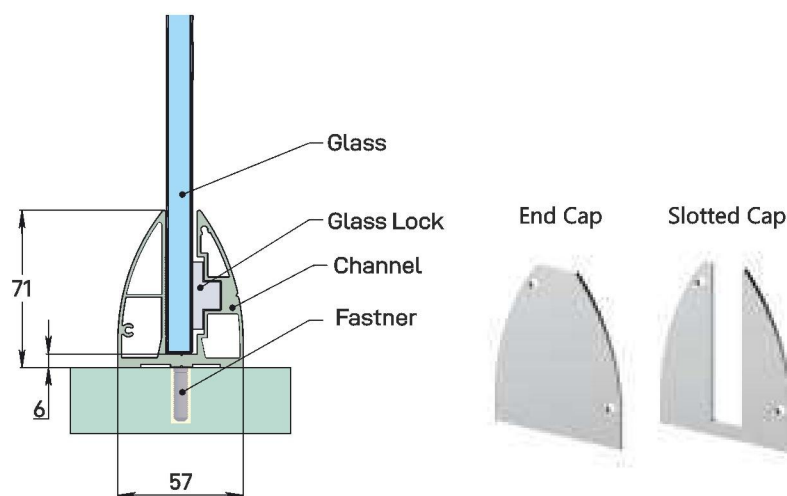

| Glass : 12 mm                                      |                |       |       |           |
|----------------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart                   |                |       |       |           |
| Glass Height                                       | Balcony Length |       |       |           |
| 24 inch                                            | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                            | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                            | 10 ft          | 20 ft |       |           |
| 42 inch                                            | 10 ft          |       |       |           |
| Anchor & Lock Patti will be fitted at every 2 feet |                |       |       |           |






## Frameless Top Mount

### Essential

#### Commercial Feri - RAB 08

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.500/0.530 gm.) (1 ft.)                  |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

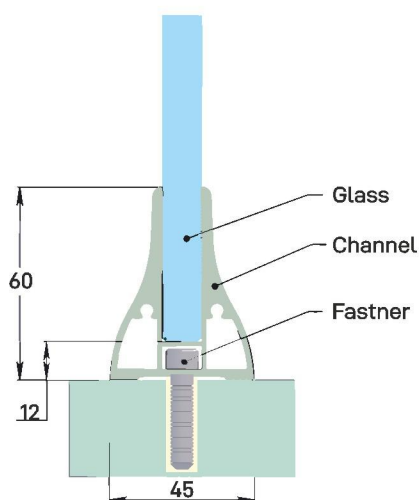

End Cap

Slotted Cap



| Glass : 12 mm                         |                |       |       |  |
|---------------------------------------|----------------|-------|-------|--|
| Recommended Railing Length Chart      |                |       |       |  |
| Glass Height                          | Balcony Length |       |       |  |
| 24 inch                               | 10 ft          | 20 ft | 30 ft |  |
| 30 inch                               | 10 ft          | 20 ft |       |  |
| 36 inch                               | 10 ft          |       |       |  |
| 42 inch                               |                |       |       |  |
| Anchor will be fitted at every 1 feet |                |       |       |  |





## Frameless Top Mount

### Essential

#### Modular Feri - RAB 09

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.580/0.630 gm.) (1 ft.)                  |
| <b>Epdm</b>     | : 0.110 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

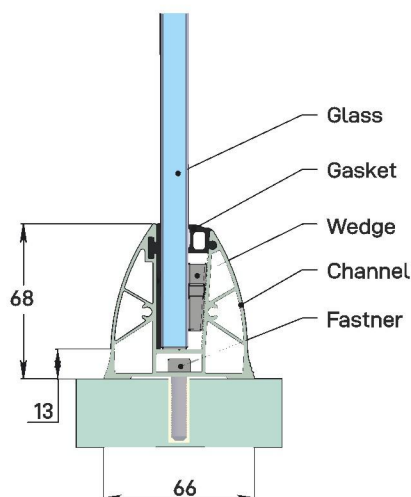

**Glass : 12 mm**

#### Recommended Railing Length Chart

| Glass Height   | Balcony Length |       |       |           |
|----------------|----------------|-------|-------|-----------|
| <b>24 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>30 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>36 inch</b> | 10 ft          | 20 ft |       |           |
| <b>42 inch</b> | 10 ft          |       |       |           |

Anchor & Wedge will be fitted at every 2 feet






## Frameless Top Mount

### Essential

#### Triangle Feri - RAB 10

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.600/0.640 gm.)                          |
| <b>Epdm</b>     | : 0.110 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

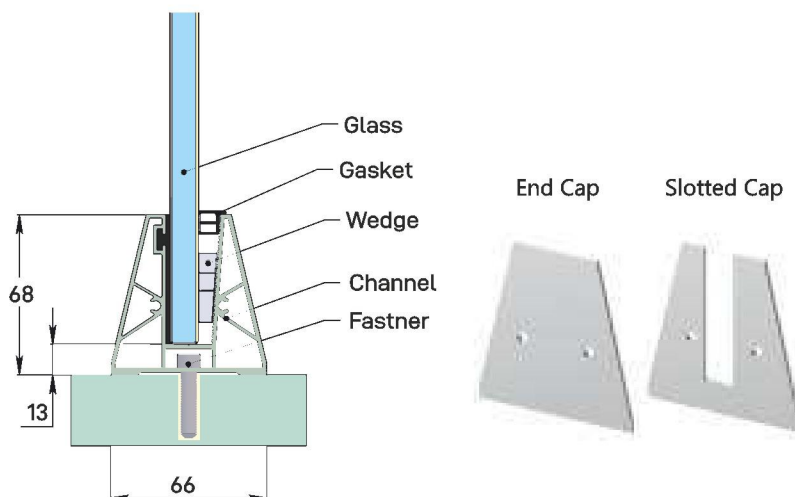

| Glass : 12 mm                                 |                |       |       |           |
|-----------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart              |                |       |       |           |
| Glass Height                                  | Balcony Length |       |       |           |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                       | 10 ft          | 20 ft |       |           |
| 42 inch                                       | 10 ft          |       |       |           |
| Anchor & Wedge will be fitted at every 2 feet |                |       |       |           |






## Frameless Top Mount

### Essential

#### Step Feri - RAB 11

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.580/0.600 gm.) (1 ft.)                  |
| <b>Epdm</b>     | : 0.110 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

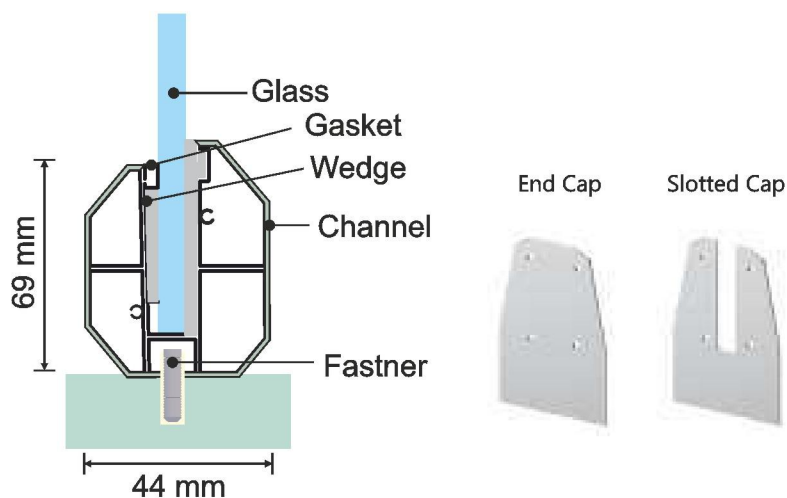

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### Clip Feri - RAB 12

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.850/0.900 gm.)                          |
| <b>Epdm</b>     | : 0.020 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

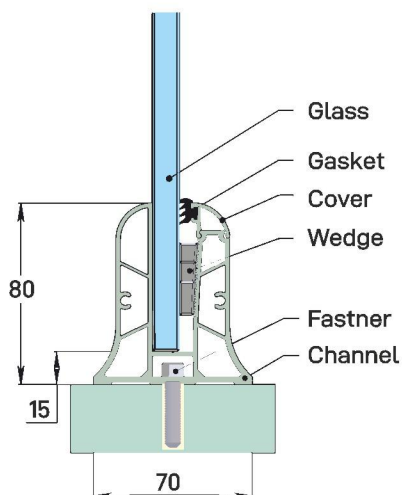

End Cap

Slotted Cap



**Glass : 12 mm**

#### Recommended Railing Length Chart

| Glass Height   | Balcony Length |       |       |           |
|----------------|----------------|-------|-------|-----------|
| <b>24 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>30 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>36 inch</b> | 10 ft          | 20 ft | 30 ft |           |
| <b>42 inch</b> | 10 ft          | 20 ft |       |           |

Anchor & Wedge will be fitted at every 2 feet







## Frameless Top Mount

### Essential

#### 30X40 Continues Channel - RAB 13

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.400/0.440 gm.)                          |
| <b>Epdm</b>     | : 0.060 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

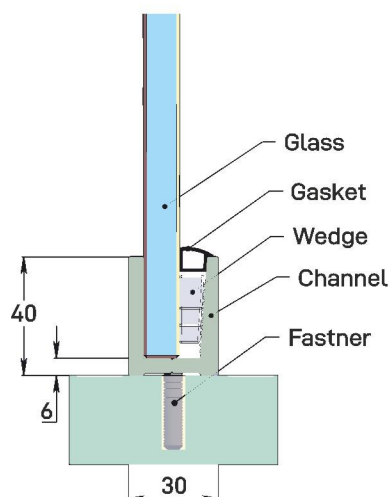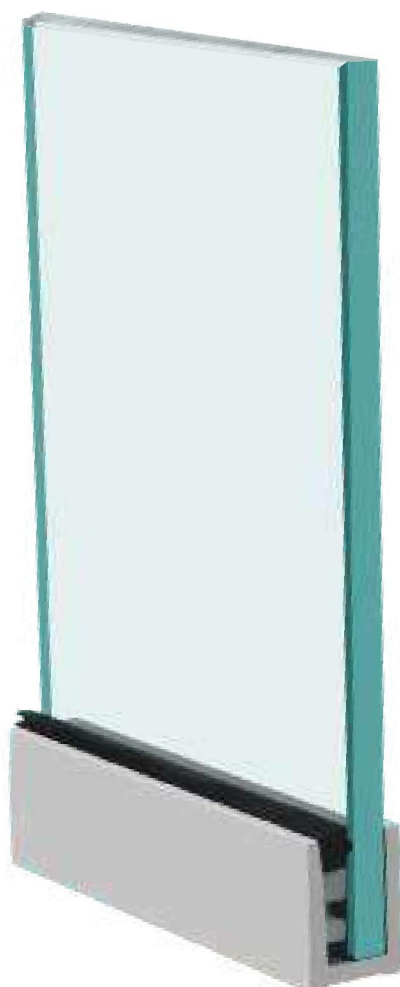

End Cap

Slotted Cap



| Glass : 12 mm                                 |                |       |       |           |
|-----------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart              |                |       |       |           |
| Glass Height                                  | Balcony Length |       |       |           |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                       | 10 ft          | 20 ft |       |           |
| 36 inch                                       | 10 ft          |       |       |           |
| 42 inch                                       |                |       |       |           |
| Anchor & Wedge will be fitted at every 1 feet |                |       |       |           |




# Frameless Top Mount

## Essential

58X32 Continues Channel - RAB 14

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.630/0.660 gm.)                          |
| <b>Epdm</b>     | : 0.080 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

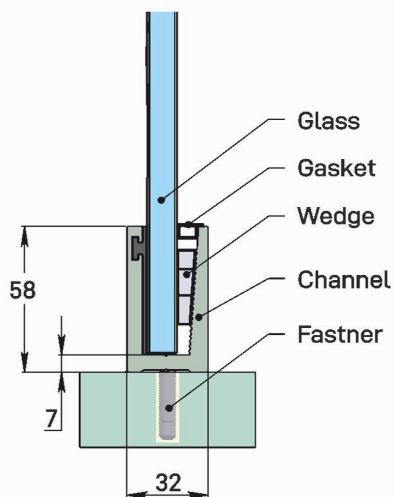

End Cap

Slotted Cap



| Glass : 12 mm                                 |                |       |       |           |
|-----------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart              |                |       |       |           |
| Glass Height                                  | Balcony Length |       |       |           |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                       | 10 ft          | 20 ft | 30 ft |           |
| 36 inch                                       | 10 ft          | 20 ft |       |           |
| 42 inch                                       |                |       |       |           |
| Anchor & Wedge will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### 80X37 Continues Channel - RAB 15

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.900/0.930 gm.)                          |
| <b>Epdm</b>     | : 0.120 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

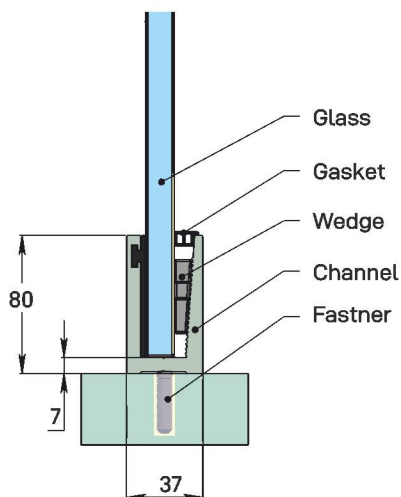


End Cap

Slotted Cap



| Glass : 12 mm                                 |                |       |       |           |
|-----------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart              |                |       |       |           |
| Glass Height                                  | Balcony Length |       |       |           |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                       | 10 ft          | 20 ft | 30 ft |           |
| 42 inch                                       | 10 ft          | 20 ft |       |           |
| Anchor & Wedge will be fitted at every 2 feet |                |       |       |           |



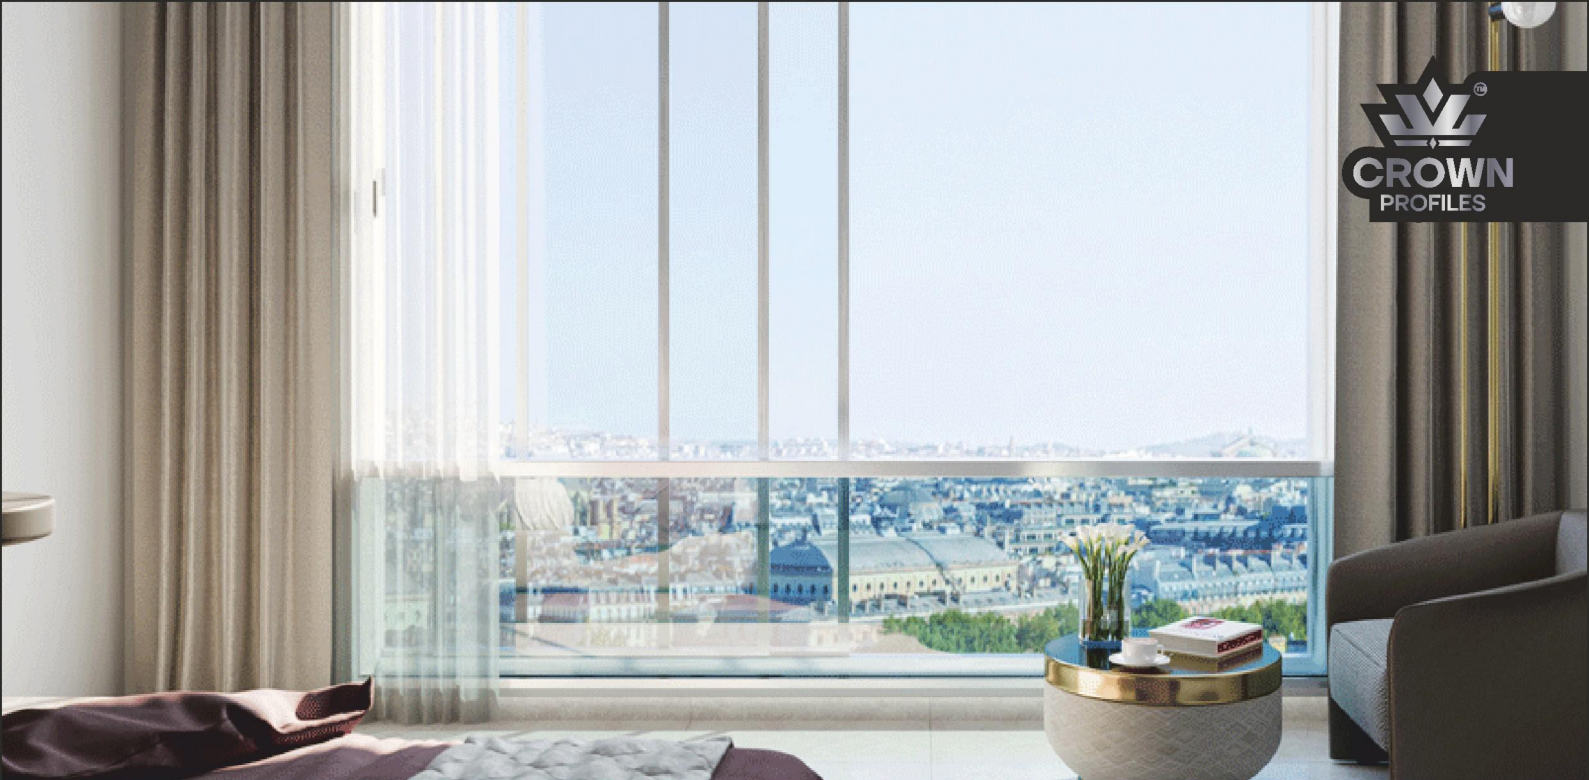


## Frameless Top Mount

### Essential

#### 100X45 Continues Channel - RAB 16

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 1.290/1.330 kg.)                          |
| <b>Epdm</b>     | : 0.110 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

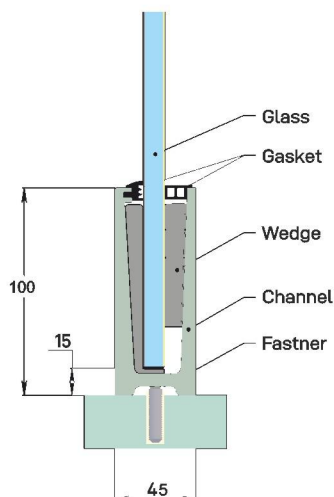

End Cap

Slotted Cap



| Glass : 12 mm                                 |                |       |       |           |
|-----------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart              |                |       |       |           |
| Glass Height                                  | Balcony Length |       |       |           |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 42 inch                                       | 10 ft          | 20 ft | 30 ft |           |
| Anchor & Wedge will be fitted at every 2 feet |                |       |       |           |






## Frameless Top Mount

### Essential

#### 117X46 Continues Channel - RAB 17

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 12 ft.                                            |
| <b>Weight</b>   | : (Approx 1.670/1.700 kg.)                          |
| <b>Epdm</b>     | : 0.110 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

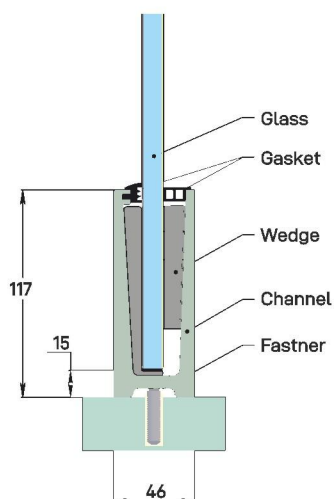

End Cap



Slotted Cap



| Glass : 12 mm                                 |                |       |       |           |
|-----------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart              |                |       |       |           |
| Glass Height                                  | Balcony Length |       |       |           |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 42 inch                                       | 10 ft          | 20 ft | 30 ft |           |
| Anchor & Wedge will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### 125X70 Continues Channel - RAB 18

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 12 ft.                                            |
| <b>Weight</b>   | : (Approx 1.700/1.730 kg.)                          |
| <b>Epdm</b>     | : 0.150 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

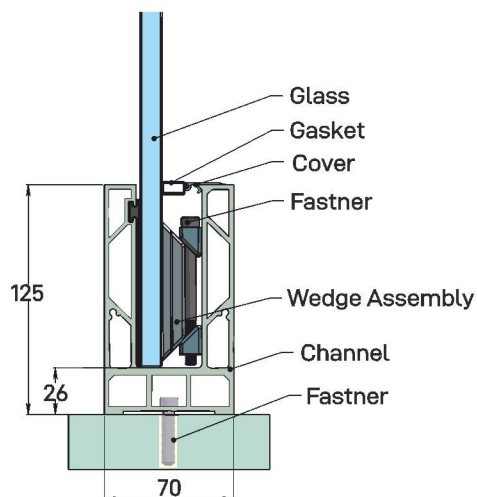

End Cap

Slotted Cap



**Glass : 12 mm, 16 mm, 25 mm**

#### Recommended Railing Length Chart

| Glass Height   | Balcony Length |       |       |           |
|----------------|----------------|-------|-------|-----------|
| <b>24 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>30 inch</b> | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>36 inch</b> | 10 ft          | 20 ft | 30 ft |           |
| <b>42 inch</b> | 10 ft          | 20 ft |       |           |

Anchor & Wedge will be fitted at every 2 feet






## Frameless Top Mount

### Essential

#### 120X60 Continues Channel - RAB 19

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 1.520/1.550 kg.)                          |
| <b>Epdm</b>     | : 0.110 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

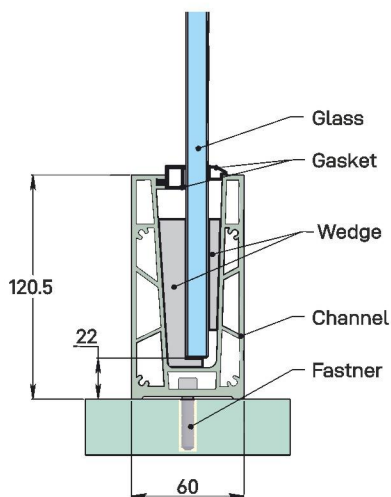

End Cap

Slotted Cap



| Glass : 12 mm, 16 mm                          |                |       |       |           |
|-----------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart              |                |       |       |           |
| Glass Height                                  | Balcony Length |       |       |           |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 42 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| Anchor & Wedge will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### Modular Step Bracket & Cover - RAB 20

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Bracket & Cover System                            |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 12 ft.                                            |
| <b>Weight</b>   | : Continues Profile (1.430/1.480 gm.) (1 ft.)       |
| <b>Epdm</b>     | : 0.060 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

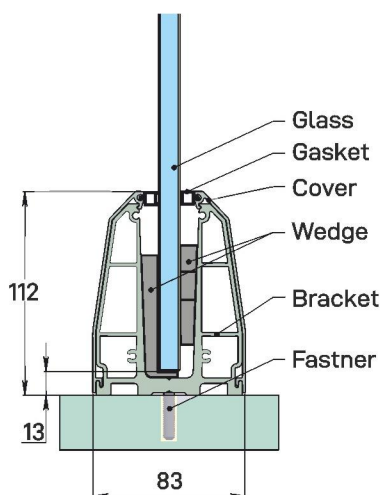

End Cap

Slotted Cap



| Glass : 12 mm, 16 mm                   |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 42 inch                                | 10 ft          | 20 ft |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |







## Frameless Top Mount

### Essential

#### 90X50 Continues Channel - RAB 21

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.900/0.950 gm.)                          |
| <b>Epdm</b>     | : 0.120 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

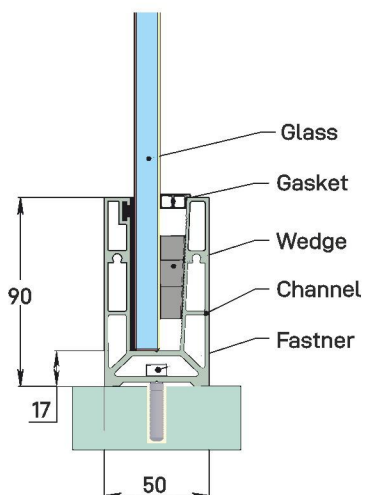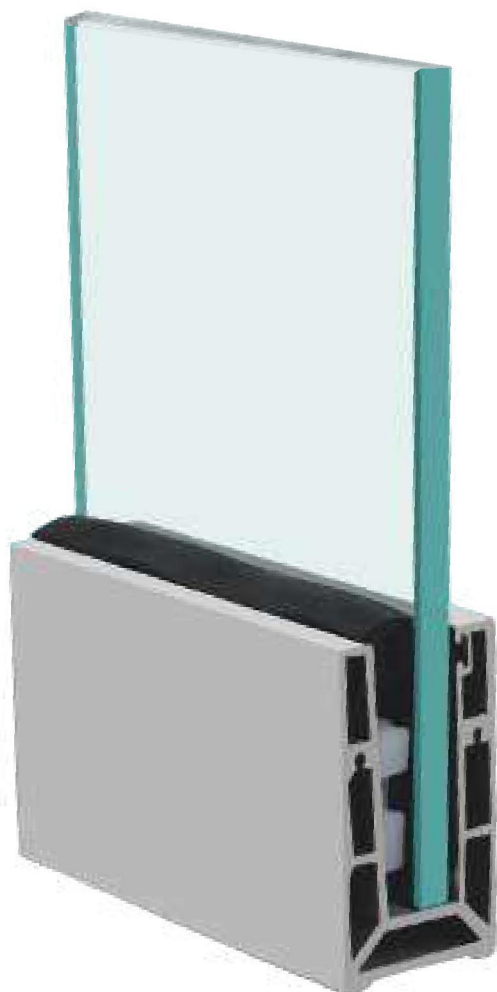

End Cap

Slotted Cap



| Glass : 12 mm                                 |                |       |       |           |
|-----------------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart              |                |       |       |           |
| Glass Height                                  | Balcony Length |       |       |           |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                       | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                       | 10 ft          | 20 ft | 30 ft |           |
| 42 inch                                       | 10 ft          | 20 ft |       |           |
| Anchor & Wedge will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### 90X40 Continues LED Channel - RAB 22

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Continuous Profile System                         |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : (Approx 0.900/0.950 gm.)                          |
| <b>Epdm</b>     | : 0.120 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

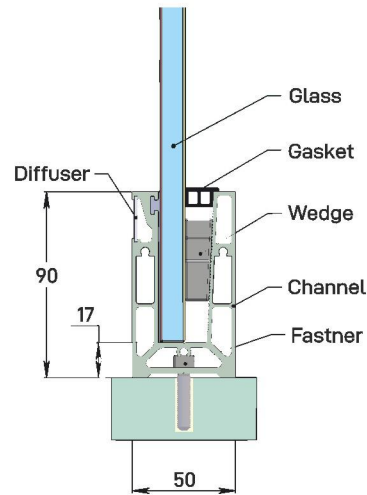

End Cap

Slotted Cap



| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                | 10 ft          | 20 ft | 30 ft |           |
| 42 inch                                | 10 ft          | 20 ft |       |           |
| Bracket will be fitted at every 1 feet |                |       |       |           |






## Frameless Top Mount

### Essential

#### F Bracket - RAP 01

|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Height</b>   | : 11 Inch                                  |
| <b>Weight</b>   | : Bracket (Approx 1.200 kg.)               |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

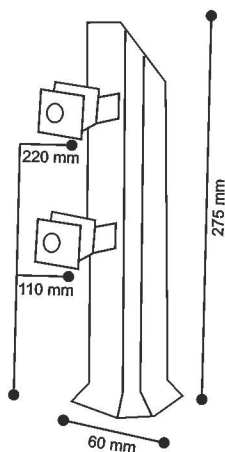

| Glass : 12 mm                                 |                |       |       |  |
|-----------------------------------------------|----------------|-------|-------|--|
| Recommended Railing Length Chart              |                |       |       |  |
| Glass Height                                  | Balcony Length |       |       |  |
| 24 inch                                       | 10 ft          | 20 ft | 30 ft |  |
| 30 inch                                       | 10 ft          | 20 ft | 30 ft |  |
| 36 inch                                       | 10 ft          | 20 ft |       |  |
| 42 inch                                       |                |       |       |  |
| Anchor & Wedge will be fitted at every 2 feet |                |       |       |  |



## Frameless Top Mount

### Essential

#### Triangle Bracket - RAP 02



|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Height</b>   | : 11 Inch                                  |
| <b>Weight</b>   | : Bracket (Approx 1.200 kg.)               |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommanded Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
|                                        |                |       |       |           |
|                                        |                |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |





## Frameless Top Mount

### Essential

#### Kite Bracket - RAP 03

|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Height</b>   | : 6 Inch                                   |
| <b>Weight</b>   | : Bracket (Approx 0.300 kg.)               |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |



| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
|                                        |                |       |       |           |
|                                        |                |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### Sqaure Spigot - RAP 04

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| <b>Type</b>     | : Bracket System                                                |
| <b>Use</b>      | : Indoor & Outdoor                                              |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                       |
| <b>Height</b>   | : 9 Inch / 6 Inch / 4 Inch                                      |
| <b>Weight</b>   | : Spigot 9 Inch 1.200 kg. / 6 Inch 0.780 gm. / 4 Inch 0.520 gm. |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating                      |

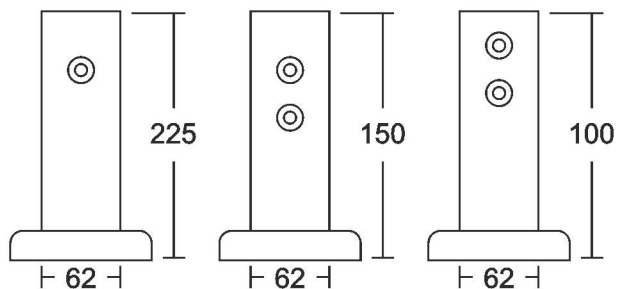






## Frameless Top Mount

### Essential

#### Oval Spigot - RAP 05

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| <b>Type</b>     | : Bracket System                                                |
| <b>Use</b>      | : Indoor & Outdoor                                              |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                       |
| <b>Height</b>   | : 9 Inch / 6 Inch / 4 Inch                                      |
| <b>Weight</b>   | : Spigot 9 Inch 1.270 kg. / 6 Inch 0.800 gm. / 4 Inch 0.520 gm. |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / Woden Coating            |

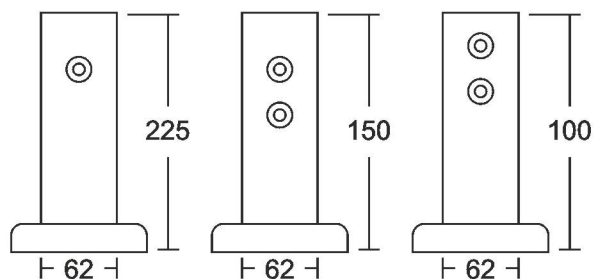




## Frameless Top Mount

### Essential

#### Round Spigot - RAP 06

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| <b>Type</b>     | : Bracket System                                                |
| <b>Use</b>      | : Indoor & Outdoor                                              |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                       |
| <b>Height</b>   | : 9 Inch / 6 Inch / 4 Inch                                      |
| <b>Weight</b>   | : Spigot 9 Inch 0.970 kg. / 6 Inch 0.620 gm. / 4 Inch 0.400 gm. |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / Woden Coating            |

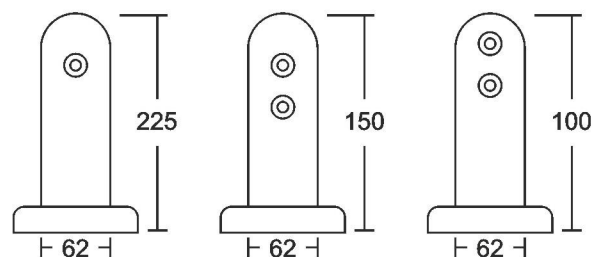








## Frameless Top Mount

### Essential

#### Six Step Spigot - RAP 07

|                 |                                                                 |
|-----------------|-----------------------------------------------------------------|
| <b>Type</b>     | : Bracket System                                                |
| <b>Use</b>      | : Indoor & Outdoor                                              |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                       |
| <b>Height</b>   | : 9 Inch / 6 Inch / 4 Inch                                      |
| <b>Weight</b>   | : Spigot 9 Inch 1.150 kg. / 6 Inch 0.720 gm. / 4 Inch 0.300 gm. |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / Woden Coating            |






## Frameless Top Mount

### Essential

#### Taper Round Spigot - RAP 08



|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Height</b>   | : 10.5 Inch                                |
| <b>Weight</b>   | : Bracket (Approx 0.950 kg.)               |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

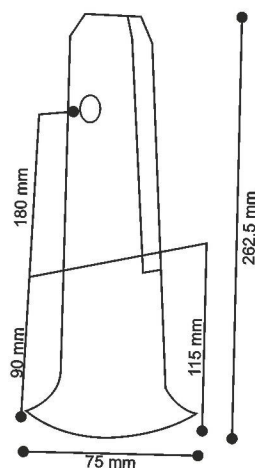

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |





## Frameless Top Mount

### Essential

#### Long Square Spigot - RAP 09



|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Length</b>   | : 9 Inch                                   |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

| Glass : 12 mm                    |                |       |       |           |
|----------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart |                |       |       |           |
| Glass Height                     | Balcony Length |       |       |           |
| 24 inch                          | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                          | 10 ft          | 20 ft | 30 ft | Unlimited |
|                                  |                |       |       |           |
|                                  |                |       |       |           |

Bracket will be fitted at every 2 feet



## Frameless Top Mount

### Essential

#### Trophy Spigot - RAP 10



|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Length</b>   | : 9 Inch                                   |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommanded Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
|                                        |                |       |       |           |
|                                        |                |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |





## Frameless Top Mount

### Essential

#### 50 x 40 mm Spigot - RAP 11

|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Length</b>   | : 9 Inch                                   |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |



| Glass : 12 mm                    |                |       |       |           |
|----------------------------------|----------------|-------|-------|-----------|
| Recommanded Railing Length Chart |                |       |       |           |
| Glass Height                     | Balcony Length |       |       |           |
| 24 inch                          | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                          | 10 ft          | 20 ft | 30 ft | Unlimited |
|                                  |                |       |       |           |
|                                  |                |       |       |           |

Bracket will be fitted at every 2 feet



## Frameless Top Mount

### Essential

#### Half Round Spigot - RAP 12



|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Length</b>   | : 9 Inch                                   |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommanded Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
|                                        |                |       |       |           |
|                                        |                |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |





## Frameless Top Mount

### Essential

#### Triangle Spigot - RAP 13



|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Length</b>   | : 9 Inch                                   |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommanded Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
|                                        |                |       |       |           |
|                                        |                |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### Step Cover Bracket - RAR 01

|                 |                                           |
|-----------------|-------------------------------------------|
| <b>Type</b>     | : Bracket System                          |
| <b>Use</b>      | : Indoor & Outdoor                        |
| <b>Material</b> | : Aluminium Alloy 6063-T6                 |
| <b>Length</b>   | : Bracket (65mm)                          |
| <b>Weight</b>   | : Step Bracket (Approx 0.680 gm.)         |
| <b>Finish</b>   | : Natural / Powder Coating / PVDF Coating |

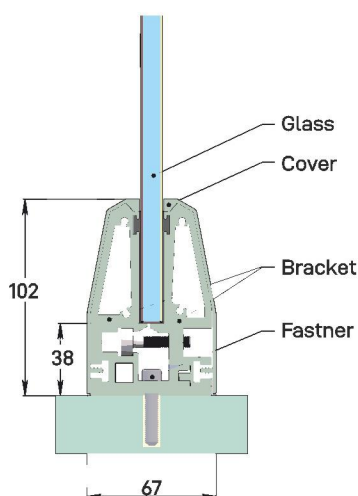

End Cap

Slotted Cap



| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft |           |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |






## Frameless Top Mount

### Essential

#### Feri Bracket - RAR 02

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Bracket System                                    |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : Bracket (75mm)                                    |
| <b>Weight</b>   | : Feri Bracket (Approx 0.220 gm.)                   |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

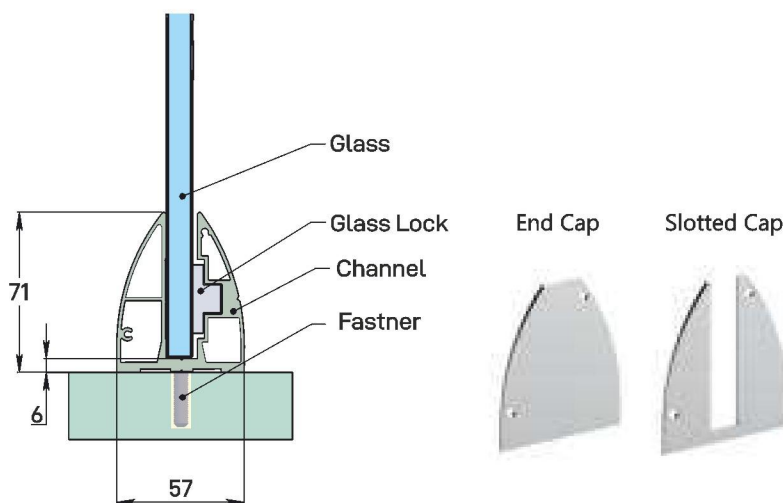


| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft |           |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |

## Frameless Top Mount

### Essential

#### Diamond Bracket - RAR 03

|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Weight</b>   | : (Approx 0.690 kg.)                       |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

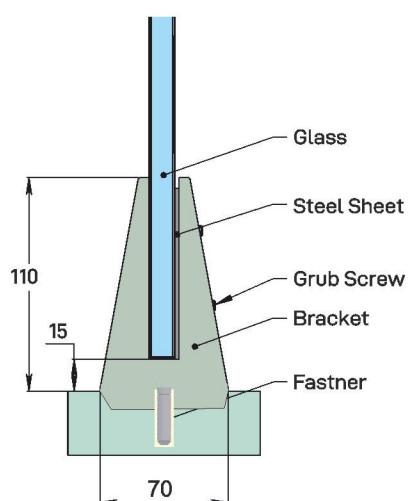

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| <b>24 inch</b>                         | 10 ft          | 20 ft | 30 ft | Unlimited |
| <b>30 inch</b>                         | 10 ft          | 20 ft | 30 ft |           |
| <b>36 inch</b>                         | 10 ft          | 20 ft |       |           |
| <b>42 inch</b>                         | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |





## Frameless Top Mount

### Essential

#### Round Bracket - RAR 04

|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Weight</b>   | : (Approx 0.650 kg.)                       |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |



| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
|                                        |                |       |       |           |
|                                        |                |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### Flower Bracket - RAR 05

|                 |                                            |
|-----------------|--------------------------------------------|
| <b>Type</b>     | : Bracket System                           |
| <b>Use</b>      | : Indoor & Outdoor                         |
| <b>Material</b> | : Aluminium Alloy 6063-T6                  |
| <b>Weight</b>   | : (Approx 1.050 kg.)                       |
| <b>Finish</b>   | : Natural / Powder Coating / Woden Coating |

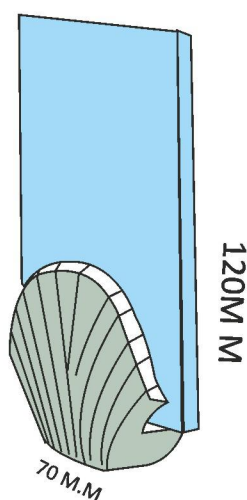

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft |           |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |







## Frameless Top Mount

### Essential

#### Tower Bracket - RAR 06

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Bracket System                                    |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : Bracket (55mm)                                    |
| <b>Weight</b>   | : (Approx 0.330 gm.)                                |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

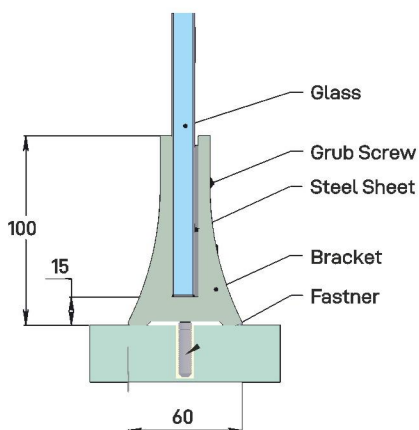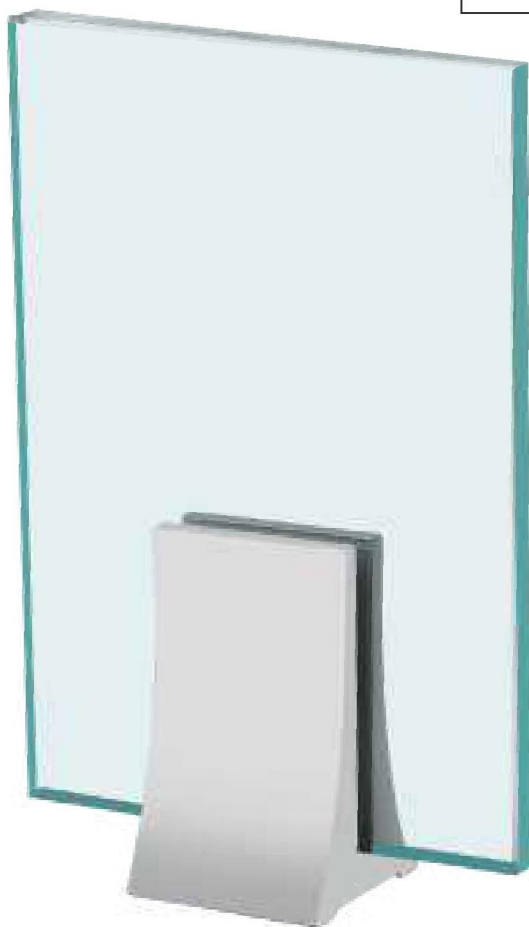

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft |           |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### V Bracket - RAR 07

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Bracket System                                    |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : Bracket (55mm)                                    |
| <b>Weight</b>   | : (Approx 0.480 gm.)                                |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

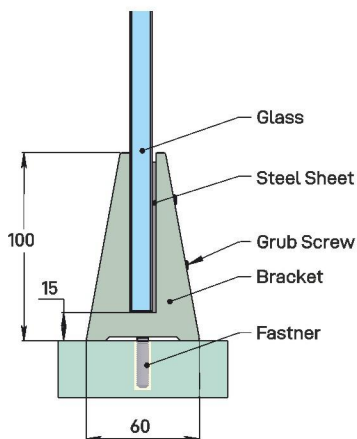

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft |           |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |






## Frameless Top Mount

### Essential

#### D Bracket - RAR 08

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Bracket System                                    |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : Bracket (55mm)                                    |
| <b>Weight</b>   | : (Approx 0.490 gm.)                                |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

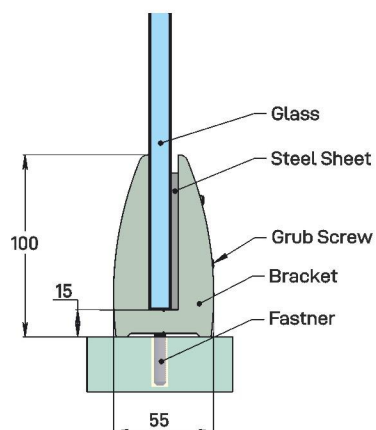

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft |           |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |




## Frameless Top Mount

### Essential

#### Heavy T Bracket - RAR 09


|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Bracket System                                    |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : Bracket (65mm)                                    |
| <b>Weight</b>   | : (Approx 0.440 kg.)                                |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |

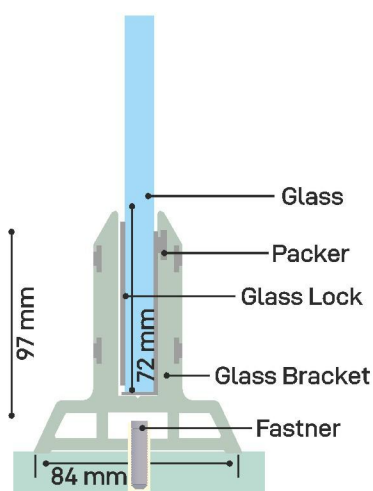

| Glass : 12 mm                          |                |       |       |           |
|----------------------------------------|----------------|-------|-------|-----------|
| Recommended Railing Length Chart       |                |       |       |           |
| Glass Height                           | Balcony Length |       |       |           |
| 24 inch                                | 10 ft          | 20 ft | 30 ft | Unlimited |
| 30 inch                                | 10 ft          | 20 ft | 30 ft |           |
| 36 inch                                | 10 ft          | 20 ft |       |           |
| 42 inch                                | 10 ft          |       |       |           |
| Bracket will be fitted at every 2 feet |                |       |       |           |



### 38 mm Round - RAT 01



Wall Canceled



Connector



Elbow





End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.190 kg. (1 ft.) EPDM Gasket (Approx 0.055 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### 50 mm Round - RAT 02

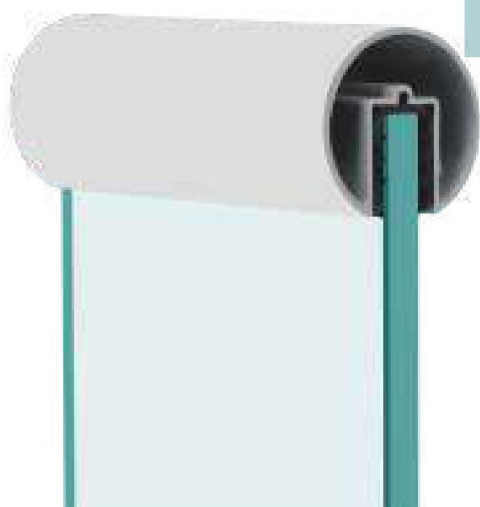

Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.290 kg. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### 65 mm Round - RAT 03



Wall Canceled



Connector



Elbow





End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.460 kg. (1 ft.) EPDM Gasket (Approx 0.110 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### Slim Pipe 17 X19 mm - RAT 04

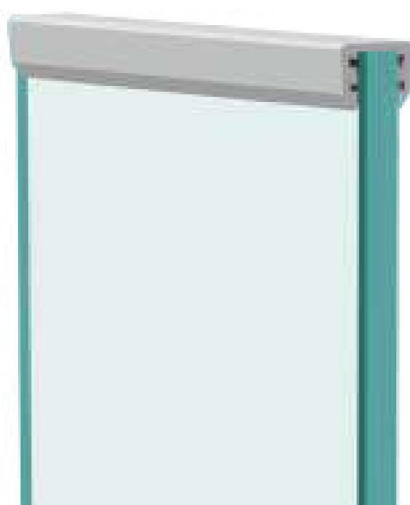

Wall Canceled



Connector



Elbow





End Cap

#### Essential

|          |                                                     |
|----------|-----------------------------------------------------|
| Type     | : Handrail System                                   |
| Use      | : Indoor & Outdoor                                  |
| Material | : Aluminium Alloy 6063-T6                           |
| Length   | : 13 ft./16 ft.                                     |
| Weight   | : 0.110 kg. (1 ft.)                                 |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating |



### 25 X 25 mm Top - RAT 05

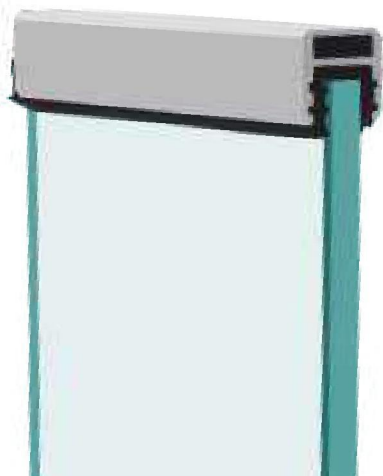

Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                        |
|----------|--------------------------------------------------------|
| Type     | : Handrail System                                      |
| Use      | : Indoor & Outdoor                                     |
| Material | : Aluminium Alloy 6063-T6                              |
| Length   | : 13 ft./16 ft.                                        |
| Weight   | : 0.190 kg. (1 ft.) EPDM Gasket (Approx 0.055 kg/feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating    |

### 32 X 32 mm Top - RAT 06



Wall Canceled



Connector



Elbow





End Cap

#### Essential

|          |                                                               |
|----------|---------------------------------------------------------------|
| Type     | : Handrail System                                             |
| Use      | : Indoor & Outdoor                                            |
| Material | : Aluminium Alloy 6063-T6                                     |
| Length   | : 13 ft./16 ft.                                               |
| Weight   | : 0.180/0.200 gm. (1 ft.) EPDM Gasket (Approx 0.080 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating           |

### 40 X 40 mm Top - RAT 07



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                               |
|----------|---------------------------------------------------------------|
| Type     | : Handrail System                                             |
| Use      | : Indoor & Outdoor                                            |
| Material | : Aluminium Alloy 6063-T6                                     |
| Length   | : 13 ft./16 ft.                                               |
| Weight   | : 0.240/0.260 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating           |

### 50 X 50 mm Top - RAT 08



Wall Canceled



Connector



Elbow





End Cap

#### Essential

|          |                                                               |
|----------|---------------------------------------------------------------|
| Type     | : Handrail System                                             |
| Use      | : Indoor & Outdoor                                            |
| Material | : Aluminium Alloy 6063-T6                                     |
| Length   | : 13 ft./16 ft.                                               |
| Weight   | : 0.330/0.350 gm. (1 ft.) EPDM Gasket (Approx 0.110 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating           |

### 60 X 40 mm Rectangle Top - RAT 09

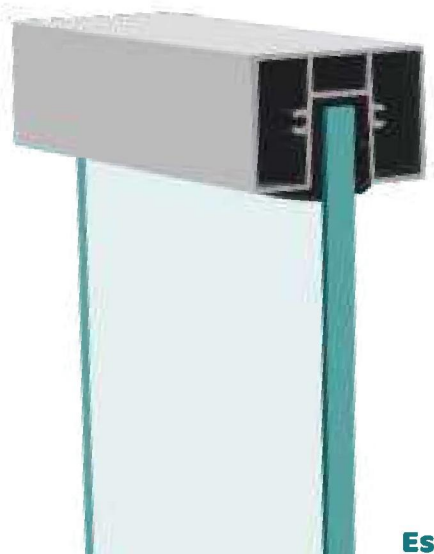

Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                               |
|----------|---------------------------------------------------------------|
| Type     | : Handrail System                                             |
| Use      | : Indoor & Outdoor                                            |
| Material | : Aluminium Alloy 6063-T6                                     |
| Length   | : 13 ft./16 ft.                                               |
| Weight   | : 0.390/0.420 gm. (1 ft.) EPDM Gasket (Approx 0.120 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating           |

### 65 X 35 mm Top - RAT 10



Wall Canceled



Connector



Elbow



End Cap

#### Essential

|          |                                                               |
|----------|---------------------------------------------------------------|
| Type     | : Handrail System                                             |
| Use      | : Indoor & Outdoor                                            |
| Material | : Aluminium Alloy 6063-T6                                     |
| Length   | : 13 ft./16 ft.                                               |
| Weight   | : 0.440/0.450 gm. (1 ft.) EPDM Gasket (Approx 0.110 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating           |




### Incline 80 X 37 mm - RAT 11



Wall Canceled



Connector



Elbow



End Cap

#### Essential

|          |                                                               |
|----------|---------------------------------------------------------------|
| Type     | : Handrail System                                             |
| Use      | : Indoor & Outdoor                                            |
| Material | : Aluminium Alloy 6063-T6                                     |
| Length   | : 13 ft./16 ft.                                               |
| Weight   | : 0.340/0.380 gm. (1 ft.) EPDM Gasket (Approx 0.070 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating           |


### Incline LED - RAT 12



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.400 gm. (1 ft.) EPDM Gasket (Approx 0.070 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### Capcule 35 X 70 mm - RAT 13



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.350 gm. (1 ft.) EPDM Gasket (Approx 0.070 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### 65 X 40 mm Triangle - RAT 14



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.330 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |



**35 X 40 mm Commercial - RAT 15**



**Wall Canceled**



**Connector**



**Elbow**




**End Cap**

### Essential

|                 |                                                     |
|-----------------|-----------------------------------------------------|
| <b>Type</b>     | : Handrail System                                   |
| <b>Use</b>      | : Indoor & Outdoor                                  |
| <b>Material</b> | : Aluminium Alloy 6063-T6                           |
| <b>Length</b>   | : 13 ft./16 ft.                                     |
| <b>Weight</b>   | : 0.250 gm. (1 ft.)                                 |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating |



**50 X 50 mm LED Pipe - RAT 16**



**Wall Canceled**



**Connector**



**Elbow**



**End Cap**


### Essential

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| <b>Type</b>     | : Handrail System                                             |
| <b>Use</b>      | : Indoor & Outdoor                                            |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                     |
| <b>Length</b>   | : 13 ft./16 ft.                                               |
| <b>Weight</b>   | : 0.420 gm. (1 ft.) EPDM Gasket (Approx 0.100/0.110 gm./feet) |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating           |





### 50 X 50 mm Side LED - RAT 17



Wall Canceled



Connector



Elbow




End Cap

### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.400 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |



### 70 X 35 mm 1 Side LED - RAT 18



Wall Canceled



Connector



Elbow




End Cap

### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.400 gm. (1 ft.) EPDM Gasket (Approx 0.070 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### 70 X 35 mm Without LED - RAT 19



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.400 gm. (1 ft.) EPDM Gasket (Approx 0.110 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### 70 X 30 mm 2 Side LED - RAT 20



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.380 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### 70 X 35 mm Without LED - RAT 21



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.360 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### 70 X 36 mm Eye Pipe - RAT 22



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.330 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |



### 50 X 50mm Incline - RAT 23



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|          |                                                         |
|----------|---------------------------------------------------------|
| Type     | : Handrail System                                       |
| Use      | : Indoor & Outdoor                                      |
| Material | : Aluminium Alloy 6063-T6                               |
| Length   | : 13 ft./16 ft.                                         |
| Weight   | : 0.350 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### 60 X 45 mm Diamond Pipe - RAT 24



Wall Canceled



Connector



Elbow



End Cap

#### Essential

|          |                                                               |
|----------|---------------------------------------------------------------|
| Type     | : Handrail System                                             |
| Use      | : Indoor & Outdoor                                            |
| Material | : Aluminium Alloy 6063-T6                                     |
| Length   | : 13 ft./16 ft.                                               |
| Weight   | : 0.370/0.390 gm. (1 ft.) EPDM Gasket (Approx 0.110 gm./feet) |
| Finish   | : Natural / Anodize / Powder Coating / PVDF Coating           |



**55 X 30 mm Mini Oval - RAT 25**



**Wall Canceled**



**Connector**



**Elbow**




**End Cap**

### Essential

|                 |                                                         |
|-----------------|---------------------------------------------------------|
| <b>Type</b>     | : Handrail System                                       |
| <b>Use</b>      | : Indoor & Outdoor                                      |
| <b>Material</b> | : Aluminium Alloy 6063-T6                               |
| <b>Length</b>   | : 13 ft./16 ft.                                         |
| <b>Weight</b>   | : 0.300 gm. (1 ft.) EPDM Gasket (Approx 0.060 gm./feet) |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating     |



**45 X 45 mm Star Pipe - RAT 26**



**Wall Canceled**



**Connector**



**Elbow**




**End Cap**

### Essential

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| <b>Type</b>     | : Handrail System                                             |
| <b>Use</b>      | : Indoor & Outdoor                                            |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                     |
| <b>Length</b>   | : 13 ft./16 ft.                                               |
| <b>Weight</b>   | : 0.260/0.290 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating           |

### 38 X 38 mm Star Pipe - RAT 27



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|                 |                                                              |
|-----------------|--------------------------------------------------------------|
| <b>Type</b>     | : Handrail System                                            |
| <b>Use</b>      | : Indoor & Outdoor                                           |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                    |
| <b>Length</b>   | : 13 ft./16 ft.                                              |
| <b>Weight</b>   | : 0.220/0.240 gm. (1 ft.) EPDM Gasket (Approx 0.080 kg/feet) |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating          |

### 50 X 40 mm Pipe - RAT 28



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|                 |                                                               |
|-----------------|---------------------------------------------------------------|
| <b>Type</b>     | : Handrail System                                             |
| <b>Use</b>      | : Indoor & Outdoor                                            |
| <b>Material</b> | : Aluminium Alloy 6063-T6                                     |
| <b>Length</b>   | : 13 ft./16 ft.                                               |
| <b>Weight</b>   | : 0.250/0.270 gm. (1 ft.) EPDM Gasket (Approx 0.080 gm./feet) |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating           |



### 65 X 38 mm Crystal Diamond - RAT 29



Wall Canceled



Connector



Elbow




End Cap

#### Essential

|                 |                                                         |
|-----------------|---------------------------------------------------------|
| <b>Type</b>     | : Handrail System                                       |
| <b>Use</b>      | : Indoor & Outdoor                                      |
| <b>Material</b> | : Aluminium Alloy 6063-T6                               |
| <b>Length</b>   | : 13 ft./16 ft.                                         |
| <b>Weight</b>   | : 0.330 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating     |

### Flower - RAT 30



Wall Canceled



Connector



Elbow



End Cap

#### Essential

|                 |                                                         |
|-----------------|---------------------------------------------------------|
| <b>Type</b>     | : Handrail System                                       |
| <b>Use</b>      | : Indoor & Outdoor                                      |
| <b>Material</b> | : Aluminium Alloy 6063-T6                               |
| <b>Length</b>   | : 13 ft./16 ft.                                         |
| <b>Weight</b>   | : 0.350 gm. (1 ft.) EPDM Gasket (Approx 0.085 gm./feet) |
| <b>Finish</b>   | : Natural / Anodize / Powder Coating / PVDF Coating     |




## Step Bracket & Cover

### L Connector for Plain Handrail

**RAP-41-A**



**Weight :** (Approx 0.240 gm.)



**RAP-41-C**




**Weight :** (Approx 0.260 gm.)

**RAP-41-B**



**Weight :** (Approx 0.220 gm.)






## Step Bracket & Cover

### Plain Pipe

#### 40 X 40 MM



#### 50 X 50 MM

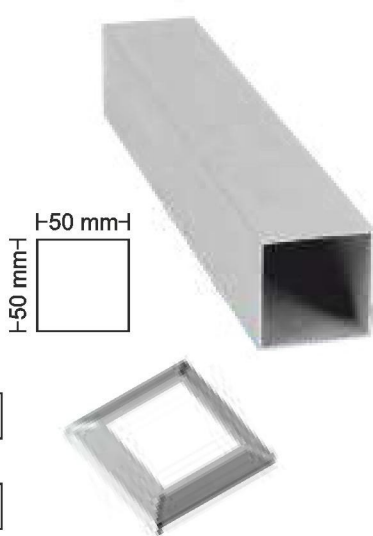

#### 38 MM



#### 50 MM



#### 40 X 40 mm

**Weight :** (Approx 0.180/0.200 gm.)

#### 50 X 50 mm

**Weight :** (Approx 0.210/0.230 kg.)

#### 38 mm

**Weight :** (Approx 0.130/0.150 gm.)

#### 50 mm

**Weight :** (Approx 0.180/0.210 kg.)

#### 38 X 38 mm Octagon

**Weight :** (Approx 0.150/0.170 gm.)

#### 45 X 45 mm Octagon

**Weight :** (Approx 0.190/0.290 kg.)





## Modular Elbow



**32 x 32 mm**



**40 x 40 mm**



**50 x 50 mm**



**38 x 38 mm**



**45 x 45 mm**



**40 mm Round**



**50 mm Round**

# Pipe to Pipe Connector



**STRAIGHT CONNECTOR PATTI**



**L-CONNECTOR PATTI**



**MODULAR CONNECTOR PATTI**

**RA-1**

**RA-2**

**RA-3**

**RA-4**



**RA-1**

**10 x 100 Rcc PVC Wall Plug Screw Anchor**

**RA-2**

**12.5 x 100 Steel Anchor**

**RA-3**

**12.5 x 75 Steel Anchor**

**RA-4**

**10 x 75 Steel Anchor**